



TRG10R VI Series Application Note V13

AC-DC Switching ADAPTER TRG10R VI Series APPLICATION NOTE



Approved By:

| Department | Approved By | Checked By | Written By |
|-------------------------------------|-------------|------------|------------|
| Research and Development Department | Ovid | Yang | Rong Bin |
| Design Quality Department | Benny | JoJo | |



TRG10R VI Series

Application Note V13

Content

| | |
|--|----------|
| 1. INTRODUCTION | 3 |
| 2. ELECTRICAL BLOCK DIAGRAM | 3 |
| 3. MAIN FEATURES AND FUNCTIONS | 4 |
| 3.1 <i>Operating Temperature Range</i> | 4 |
| 3.2 <i>Output Current Protection</i> | 4 |
| 4. APPLICATIONS | 4 |
| 4.1 <i>Test Set-Up</i> | 4 |
| 4.2 <i>Output Ripple and Noise Measurement</i> | 4 |
| 5. PACKING INFORMATION | 5 |




TRG10R VI Series

Application Note V13

1. Introduction

This application note describes the features and functions of Cincon's TRG10R VI series of adapter, switching AC-DC power. These are highly efficient, reliable, compact, high power density, single output AC/DC power. The power is fully protected against short circuit and over-voltage conditions. Cincon's world class automated manufacturing methods, together with an extensive testing and qualification program, ensure that the TRG10R VI series power is extremely reliable.

2. Electrical Block Diagram

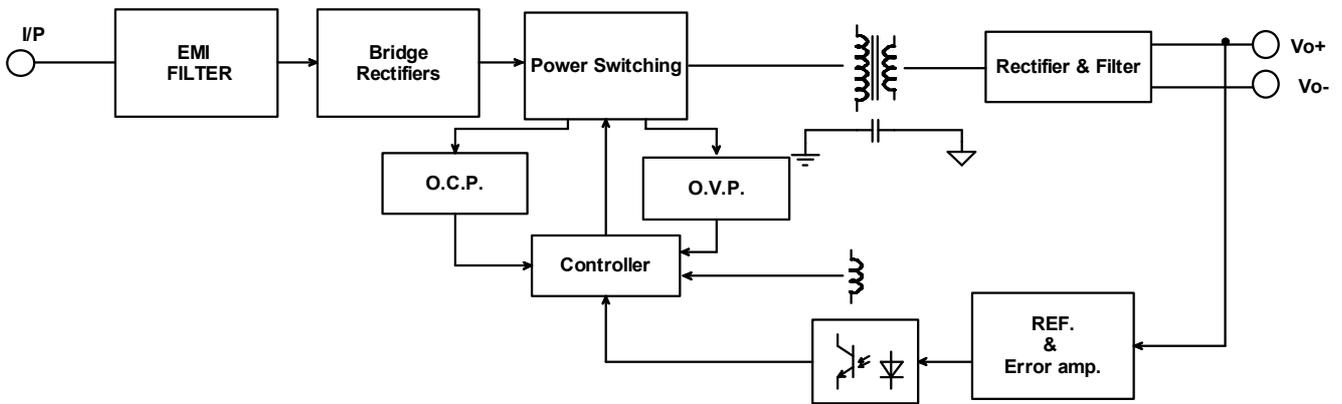



TRG10R VI Series

Application Note V13

3. Main Features and Functions

3.1 Operating Temperature Range

The highly efficient design of Cincon's TRG10R VI series power has resulted in their ability to operate within ambient temperature environments from -20°C to 40°C. Due consideration must be given to the de-rating curves when ascertaining the maximum power that can be drawn from the power. The maximum power which can be drawn is influenced by a number of factors, such as:

- Input voltage range
- Permissible output load (per derating curve)
- Effective heat sinks

3.2 Output Current Protection

All different voltage models have a full continuous short-circuit protection. The unit will auto recover once the short circuit is removed. To provide protection in a fault condition, the unit is equipped with internal over-current protection. The unit operates normally once the fault condition is removed. The power module will supply up to 140% of rated current. In the event of an over current converter will go into a hiccup mode protection

4. Applications

4.1 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 1. When testing the Cincon's TRG10R VI series under any transient conditions, please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{P_{in}} \times 100\%$$

Where:

- Vo is output voltage,
- Io is output current,
- Pin is input power,

The value of load regulation is defined as:

$$Load\ reg1. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

- V_{FL} is the output voltage at full load
- V_{NL} is the output voltage at 60% load

The value of line regulation is defined as:

$$Load\ reg2. = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where:

- V_{FL} is the output voltage at 60% load
- V_{NL} is the output voltage at 20% load

The value of line regulation is defined as:

$$Line\ reg. = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

- V_{HL} is the output voltage of maximum input voltage at full load.
- V_{LL} is the output voltage of minimum input voltage at full load.

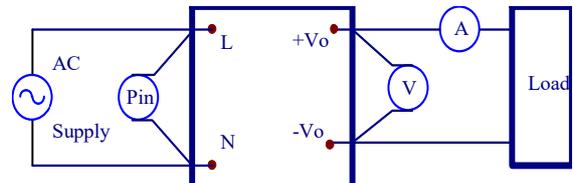


Figure 1. TRG10R VI Series Test Setup

4.2 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure 2 Measured method:

Add a C1: 10uF electrolytic capacitor and a C2: 0.1uF ceramic capacitor to output at 20 MHz band width.

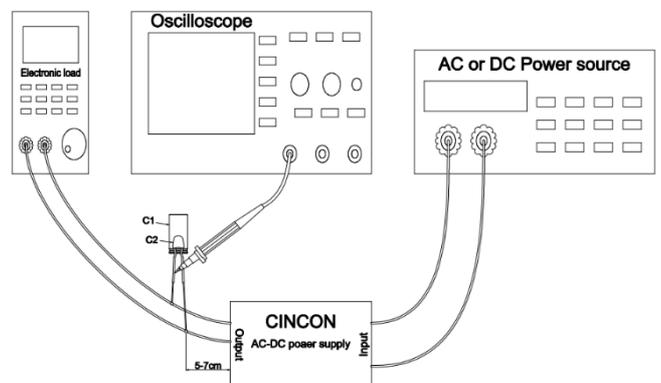


Figure 2. Output Voltage Ripple and Noise Measurement Set-Up




TRG10R VI Series

Application Note V13

5. Packing Information

The packing information for TRG10R series is showing as follows:

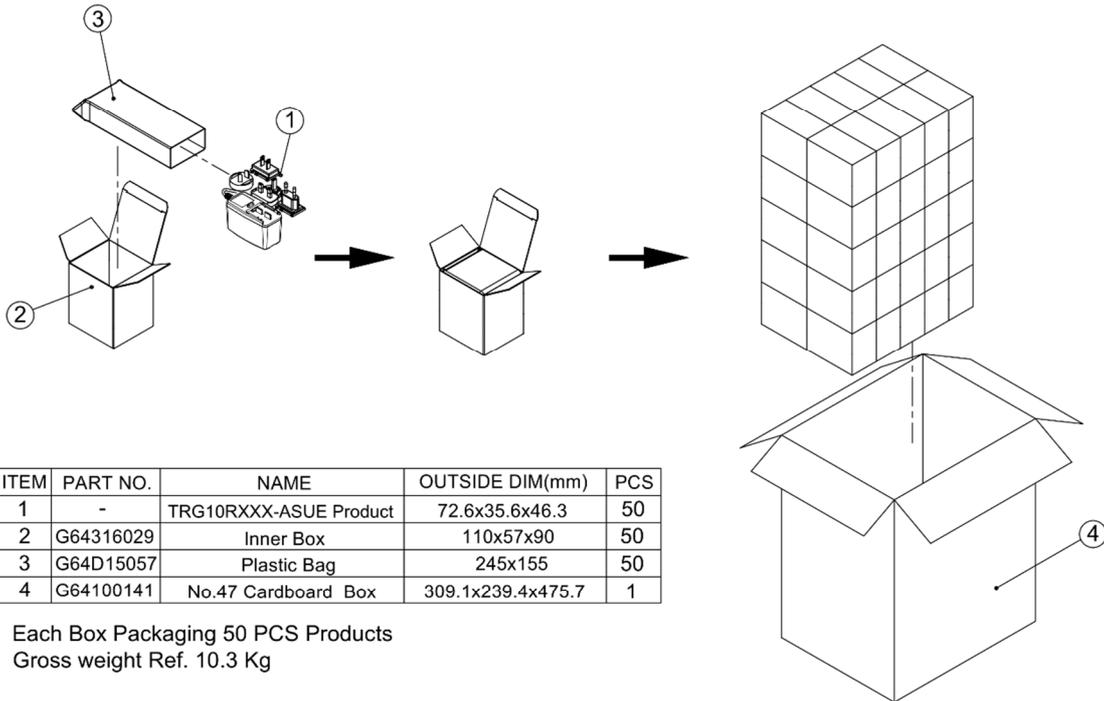

Headquarters:

14F, No.306, Sec.4, Hsin Yi Rd.
Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web Site: <https://www.cincon.com>

CINCON ELECTRONICS CO., LTD.

Factory:

No. 8-1, Fu Kung Rd.
Fu Hsing Industrial Park
Fu Hsing Hsiang,
Chang Hua Hsien, Taiwan
Tel: 886-4-7690261
Fax: 886-4-7698031

Cincon North America:

1655 Mesa Verde Ave. Ste 180
Ventura, CA 93003
Tel: 805-639-3350
Fax: 805-639-4101
E-mail: info@cincon.com