



**ISOLATED DC-DC Converter
EC5SAW SERIES
APPLICATION NOTE**



Approved By:

| Department | Approved By | Checked By | Reported By |
|--|-------------|------------|-------------|
| Research and Development Department | Enoch | Danny | Johnny |
| | | Jacky | |
| Quality Assurance Department | Ryan | Benny | |



Content

| | |
|---|-----------|
| 1. INTRODUCTION | 3 |
| 2. DC-DC CONVERTER FEATURES | 3 |
| 3. ELECTRICAL BLOCK DIAGRAM | 3 |
| 4. TECHNICAL SPECIFICATIONS | 4 |
| 5. MAIN FEATURES AND FUNCTIONS | 8 |
| 5.1 Operating Temperature Range | 8 |
| 5.2 UVLO (Under Voltage Lock Out) | 8 |
| 5.3 Over Current Protection | 8 |
| 5.5 Remote On/Off | 8 |
| 6. APPLICATIONS | 8 |
| 6.1 Recommended Layout PCB Footprints and Soldering Information | 8 |
| 6.3 Input De-Rating Curves for EC5SAW Series | 9 |
| 6.4 Efficiency vs. Load Curves | 10 |
| 6.5 Input Capacitance at the Power Module | 13 |
| 6.6 Test Set-Up | 13 |
| 6.7 Output Ripple and Noise Measurement | 13 |
| 6.8 Output Capacitance | 13 |
| 7. SAFETY & EMC | 14 |
| 7.1 Input Fusing and Safety Considerations. | 14 |
| 7.2 EMC Considerations | 14 |
| 8. PART NUMBER | 20 |
| 9. MECHANICAL SPECIFICATIONS | 20 |



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

1. Introduction

The EC5SAW series offer 6.6-10 watts of output power in a 0.87x0.37x0.47 inches SIP-8 plastic packages. The EC5SAW series has a 4:1 wide input voltage range of 9-36 and 18-75VDC and provides a precisely regulated output. This series has features such as high efficiency, 3000VDC/2000VAC of isolation and allows an ambient operating temperature range of -40°C to 85°C with de-rating. The features include short circuit protection and remote on/off control. All models are very suitable for distributed power architectures, telecommunications, battery operated equipment and industrial applications.

2. DC-DC Converter Features

- * 4:1 Input Range
- * Regulated Outputs
- * 3000VDC/2000VAC Isolation
- * Efficiency Up to 89.5%
- * Compact SIP8 Package
- * Remote On/Off Control
- * 6.6-10W Isolated Output
- * Fixed Switching Frequency
- * No Tantalum Capacitor Inside
- * Input Under-Voltage Protection
- * Low No Load Power Consumption
- * Continuous Short Circuit Protection

3. Electrical Block Diagram

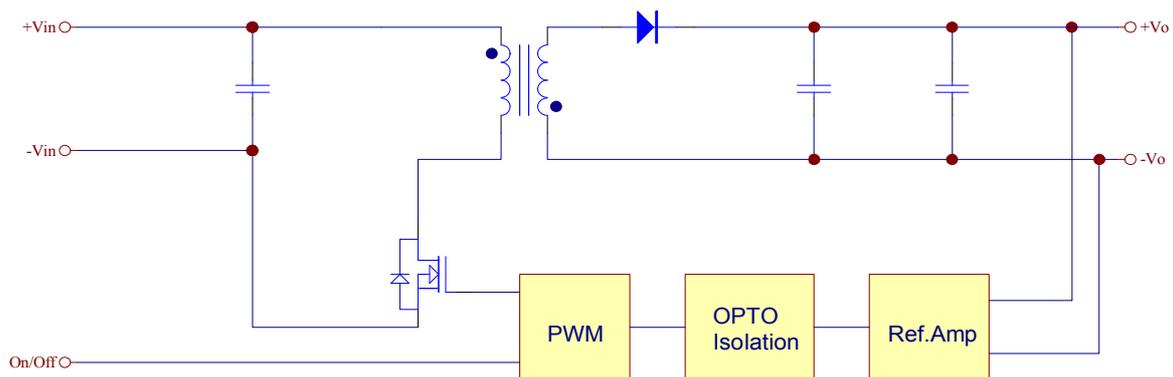


Figure1 Electrical Block Diagram of single output module

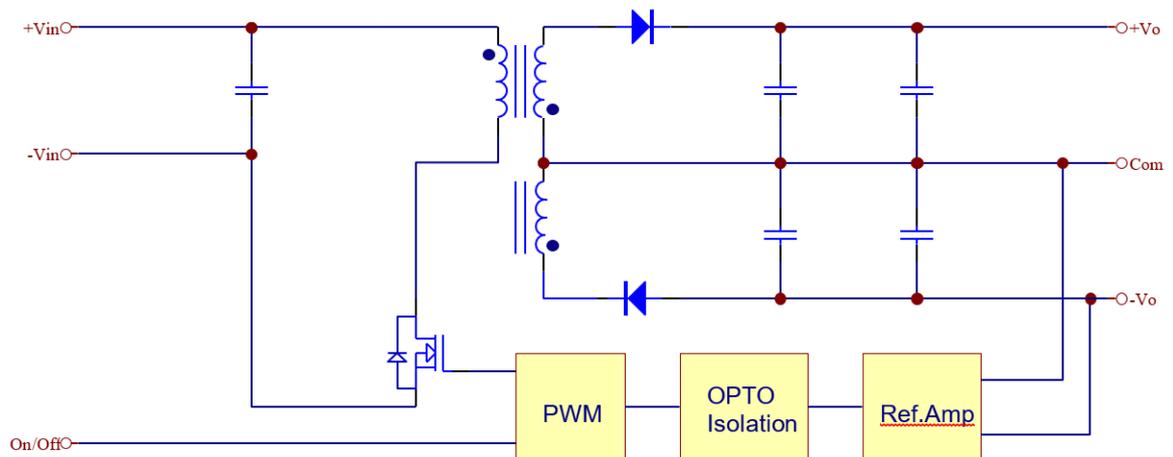


Figure2 Electrical Block Diagram of dual output module



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|--------------------------------|-------------------------------|--------|------|---------|------|-------|
| Input Voltage | | | | | | |
| Continuous | | 24Vin | -0.3 | | 36 | Vdc |
| | | 48Vin | -0.3 | | 75 | |
| Transient | 100ms | 24Vin | | | 50 | Vdc |
| | | 48Vin | | | 100 | |
| Operating Ambient Temperature | With de-rating, above See 6.2 | All | -40 | | +85 | °C |
| Case Temperature | | All | | | 105 | °C |
| Storage Temperature | | All | -55 | | +125 | °C |
| Input/Output Isolation Voltage | 1 minute | All | 3000 | | | Vdc |
| | | | 2000 | | | Vac |

INPUT CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------------------------------|-------------------------------------|--------|------|---------|------|------------------|
| Operating Input Voltage | | 24Vin | 9 | 24 | 36 | Vdc |
| | | 48Vin | 18 | 48 | 75 | |
| Turn-On Voltage Threshold | | 24Vin | 8 | 8.5 | 8.8 | Vdc |
| | | 48Vin | 16.5 | 17 | 17.5 | |
| Turn-Off Voltage Threshold | | 24Vin | 7.7 | 8 | 8.3 | Vdc |
| | | 48Vin | 15.5 | 16 | 16.5 | |
| Lockout Hysteresis Voltage | | 24Vin | | 0.5 | | Vdc |
| | | 48Vin | | 1 | | |
| Maximum Input Current | 100% load, Vin= 9V | 24Vin | | 1400 | | mA |
| | 100% load, Vin=18V | 48Vin | | 700 | | |
| No-Load Input Current | Vin=Nominal input | 24S33N | | 6 | | mA |
| | | 24S05N | | 6 | | |
| | | 24S12N | | 6 | | |
| | | 24S15N | | 6 | | |
| | | 24D05N | | 6 | | |
| | | 24D12N | | 7 | | |
| | | 24D15N | | 7 | | |
| | | 48S33N | | 6 | | |
| | | 48S05N | | 6 | | |
| | | 48S12N | | 6 | | |
| | | 48S15N | | 6 | | |
| | | 48D05N | | 6 | | |
| | | 48D12N | | 6 | | |
| | | 48D15N | | 6 | | |
| Inrush Current (I ² t) | | All | | | 0.01 | A ² s |
| Input Reflected-Ripple Current | P-P thru 1uH inductor, 5Hz to 20MHz | All | | 30 | | mA |



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

OUTPUT CHARACTERISTIC

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------------------------------|---|-----------|--------|---------|--------|-------|
| Output Voltage Set Point | Vin=Nominal Vin, Io=Io max., Tc=25°C | Vo=3.3Vdc | 3.267 | 3.3 | 3.333 | Vdc |
| | | Vo=5Vdc | 4.95 | 5 | 5.05 | |
| | | Vo=12Vdc | 11.88 | 12 | 12.12 | |
| | | Vo=15Vdc | 14.85 | 15 | 15.15 | |
| | | Vo=±5Vdc | ±4.95 | ±5 | ±5.05 | |
| | | Vo=±12Vdc | ±11.88 | ±12 | ±12.12 | |
| | | Vo=±15Vdc | ±14.85 | ±15 | ±15.15 | |
| Output Voltage Balance | Vin=nominal, Io=Iomax, Tc=25°C | Dual | | | ±1.0 | % |
| Output Voltage Regulation | | | | | | |
| Load Regulation | Io=Full Load to 0% Load | All | | | ±1.0 | % |
| Line Regulation | Vin=low line to high line full load | All | | | ±0.2 | % |
| Temperature Coefficient | Ta=-40°C to 85°C | All | | | ±0.02 | %/°C |
| Output Voltage Ripple and Noise | | | | | | |
| Peak-to-Peak | Full Load, 20MHz bandwidth with 1uF ceramic capacitor | Vo=3.3Vdc | | | 100 | mV |
| | | Vo=5Vdc | | | 100 | |
| | | Vo=12Vdc | | | 120 | |
| | | Vo=15Vdc | | | 150 | |
| | | Vo=±5Vdc | | | 100 | |
| | | Vo=±12Vdc | | | 120 | |
| | | Vo=±15Vdc | | | 150 | |
| Operating Output Current Range | | Vo=3.3Vdc | 0 | | 2000 | mA |
| | | Vo=5Vdc | 0 | | 2000 | |
| | | Vo=12Vdc | 0 | | 833 | |
| | | Vo=15Vdc | 0 | | 666 | |
| | | Vo=±5Vdc | 0 | | ±1000 | |
| | | Vo=±12Vdc | 0 | | ±417 | |
| | | Vo=±15Vdc | 0 | | ±333 | |
| Output DC Current-Limit Inception | Output voltage =90% nominal Output voltage | All | | 180 | | % |
| Maximum Output Capacitance | Full load, resistance | Vo=3.3Vdc | 0 | | 2000 | uF |
| | | Vo=5Vdc | 0 | | 2000 | |
| | | Vo=12Vdc | 0 | | 836 | |
| | | Vo=15Vdc | 0 | | 666 | |
| | | Vo=±5Vdc | 0 | | 1000 | |
| | | Vo=±12Vdc | 0 | | 417 | |
| | | Vo=±15Vdc | 0 | | 333 | |

DYNAMIC CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|---------------------------------------|-------------------------------------|--------|------|---------|------|-------|
| Output Voltage Current Transient | | | | | | |
| Step Change in Output Current | 75% to 100% of Io,max di/dt=0.1A/us | All | | | ±5 | % |
| Setting Time (within 1% Vout nominal) | | All | | | 250 | us |



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|---------------------------------|--|--------|------|---------|------|-------|
| Turn-On Delay and Rise Time | | | | | | |
| Turn-On Delay Time, From Input | V _{in,min.} to 10%V _{o,set} | All | | 3 | | ms |
| Turn-On Delay Time, From On/off | V _{on/off} to 10% V _{o,set} | All | | 2 | | ms |
| Output Voltage Rise Time | 10%V _{o,set} to 90%V _{o,set} | All | | 3 | | ms |

EFFICIENCY

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------|---|--------|------|---------|------|-------|
| 100% Load | V _{in} =Nominal V _{in} , I _o =I _{o,max} , T _c =25°C | 24S33 | | 81.5 | | % |
| | | 24S05 | | 85 | | |
| | | 24S12 | | 89 | | |
| | | 24S15 | | 89.5 | | |
| | | 24D05 | | 85 | | |
| | | 24D12 | | 89 | | |
| | | 24D15 | | 89 | | |
| | | 48S33 | | 81 | | |
| | | 48S05 | | 85 | | |
| | | 48S12 | | 88 | | |
| | | 48S15 | | 88 | | |
| | | 48D05 | | 85 | | |
| | | 48D12 | | 88 | | |
| 48D15 | | 88 | | | | |
| 100% Load | V _{in} =12Vdc, I _o =I _{o,max} , T _a =25°C | 24S33 | | 81 | | % |
| | | 24S05 | | 83.5 | | |
| | | 24S12 | | 87 | | |
| | | 24S15 | | 88.5 | | |
| | | 24D05 | | 84 | | |
| | | 24D12 | | 88.5 | | |
| | | 24D15 | | 88.5 | | |
| | V _{in} =24Vdc, I _o =I _{o,max} , T _a =25°C | 48S33 | | 81 | | |
| | | 48S05 | | 84 | | |
| | | 48S12 | | 87.5 | | |
| | | 48S15 | | 88.5 | | |
| | | 48D05 | | 84 | | |
| | | 48D12 | | 88 | | |
| | | 48D15 | | 87.5 | | |

ISOLATION CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------------------|---------------------------|--------|------|---------|------|-------|
| Isolation Voltage | Input to output 1 minutes | All | | | 3000 | Vdc |
| | | | | | 2000 | Vac |
| Isolation Resistance | Input to output | All | | | 1000 | MΩ |
| Isolation Capacitance | Input to output | All | | | 50 | pF |



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

FEATURE CHARACTERISTICS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------------------------|---------------------------------------|--------|------|---------|------|-------|
| Switching Frequency | V_{in} =Nominal, I_o = I_o .max | All | | 530 | | KHz |
| On/Off Control | | | | | | |
| Module On | Open circuit, high impedance | All | | | | |
| Module Off | Current of $V_{on/off}$ pin | All | 2 | | 4 | mA |
| Off Converter Input Current | Shutdown input idle current | All | | | 2.5 | mA |

GENERAL SPECIFICATIONS

| PARAMETER | NOTES and CONDITIONS | Device | Min. | Typical | Max. | Units |
|-----------|--|--------|------|---------|------|---------|
| MTBF | I_o =100% of I_o .max, T_a =25°C per MIL-HDBK-217F | All | | 1930 | | K hours |
| Weight | | All | | 4.9 | | g |



5. Main Features and Functions

5.1 Operating Temperature Range

The EC5SAW series converters can be operated by a wide ambient temperature range from -40°C to 85°C with de-rating. The standard model has a plastic case and case temperature can not over 105°C at normal operating.

5.2 UVLO (Under Voltage Lock Out)

Input under voltage lockout is standard on the EC5SAW unit. The unit will shut down when the input voltage drops below a threshold, and the unit will operate when the input voltage goes above the upper threshold.

5.3 Over Current Protection

All different voltage models have full continuous short-circuit protection. To provide protection in a fault condition, the unit is equipped with internal over-current protection. The unit operates normally once the fault condition is removed. At the point of current-limit inception, the converter will go into over current protection mode.

5.5 Remote On/Off

The remote on/off input feature of the converter allows external circuitry to turn the converter on or off. Active-high remote on/off is available as standard. The converter is turned on if the remote on/off pin is open circuit. Supplying the on/off pin at 2mA to 4mA will turn the converter off. The signal level of the on/off pin is defined with respect to ground. If not using the on/off pin, leave the pin open (module will be on), recommended application circuit refer figure 3.

On/Off pin appliend current via 1K

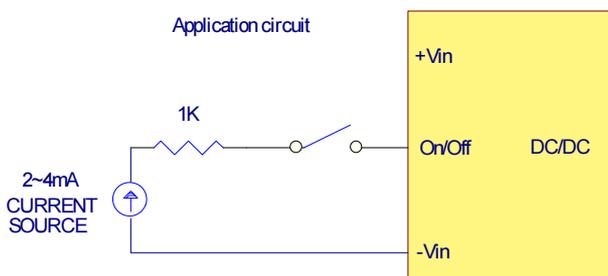



Figure 3 Recommended Application Circuit

6. Applications


6.1 Recommended Layout PCB Footprints and Soldering Information

The system designer or the end user must ensure that other components and metal in the vicinity of the converter meet the spacing requirements to which the system is approved. Low resistance and low inductance pcb layout traces are the norm and should be used where possible. Due consideration must also be given

to proper low impedance tracks between power module, input and output grounds. The recommended footprints and soldering profiles are shown as figure 4.

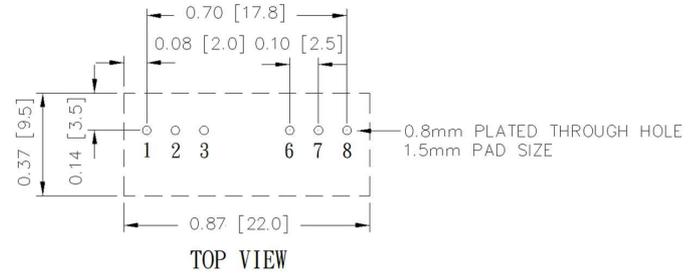

Note: Dimensions are in inches (millimeters)
Lead Free Wave Soldering Profile

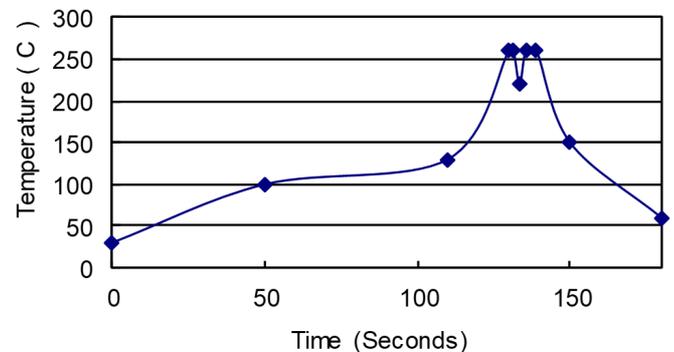

Note :

1. Soldering Materials: Sn/Cu/Ni
2. Ramp up rate during preheat: $1.4^{\circ}\text{C}/\text{Sec}$ (From 50°C to 100°C)
3. Soaking temperature: $0.5^{\circ}\text{C}/\text{Sec}$ (From 100°C to 130°C), 60 ± 20 seconds
4. Peak temperature: 260°C , above 250°C 3~6 Seconds
5. Ramp up rate during cooling: $-10.0^{\circ}\text{C}/\text{Sec}$ (From 260°C to 150°C)

Figure 4 Recommended PCB Layout Footprints and Wave Soldering Profiles for SIL packages



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019


6.2 Power De-Rating Curves for EC5SAW Series

Operating Ambient temperature Range: $-40^{\circ}\text{C} \sim 50^{\circ}\text{C}$ without derating for 3.3&5Vout.

$-40^{\circ}\text{C} \sim 60^{\circ}\text{C}$ without derating for 12&15Vout.

Maximum case temperature under any operating condition should not exceed 105°C .

De-rating measured with nominal line. Mounted test board (43.18x27.94x1.6mm, 2Oz)

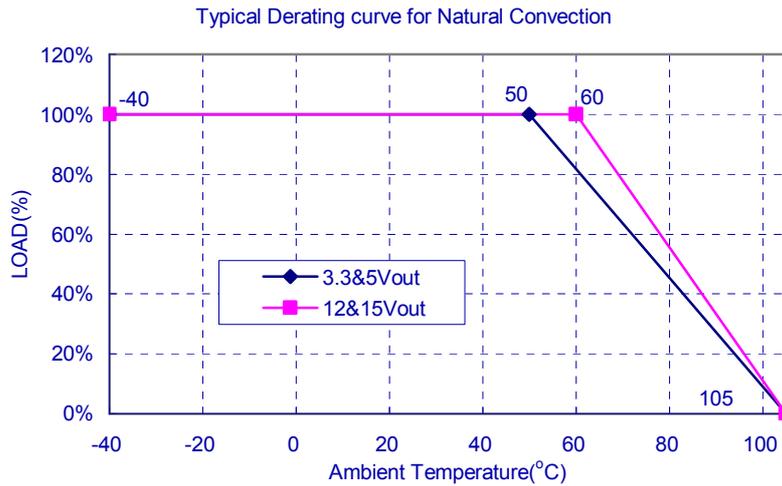

6.3 Input De-Rating Curves for EC5SAW Series

For 3.3Vo, 5Vo & $\pm 5\text{Vo}$ has derating by input voltage is required. shown Figure 5.



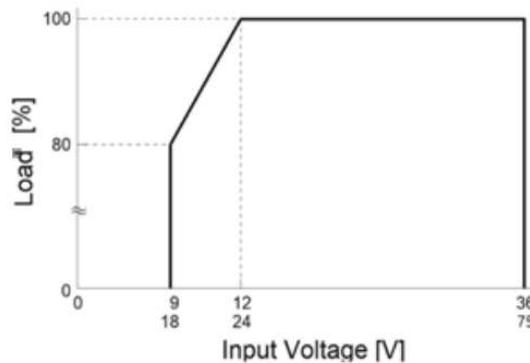


Figure 5: Input De-Rating Curves

Recommended PCB Layout with de-rating. (43.18x27.94x1.6mm, 2Oz)

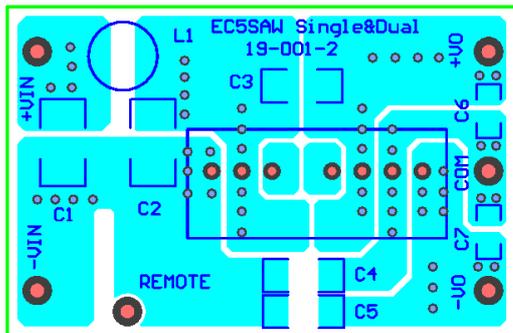

TOP Layer

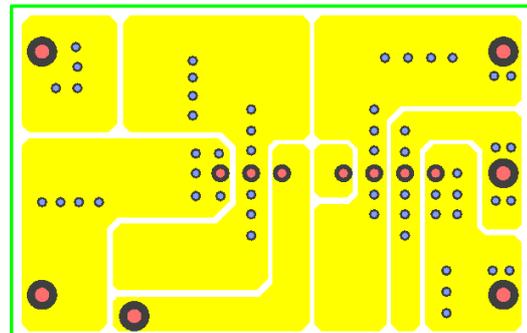

Bottom Layer




EC5SAW 6.6-10W Isolated DC-DC Converters


Application Note V10 October 2019

6.4 Efficiency vs. Load Curves


EC5SAW-24S33N (Eff Vs Io)

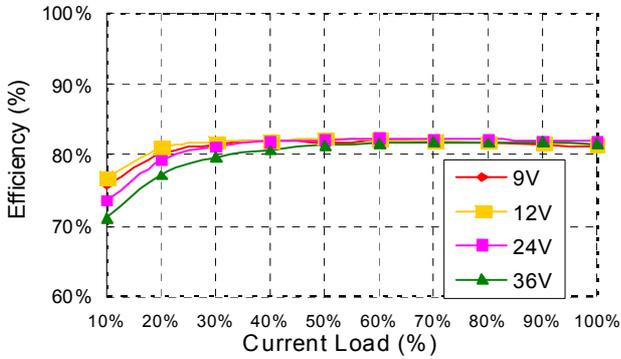


EC5SAW-24S05N (Eff Vs Io)

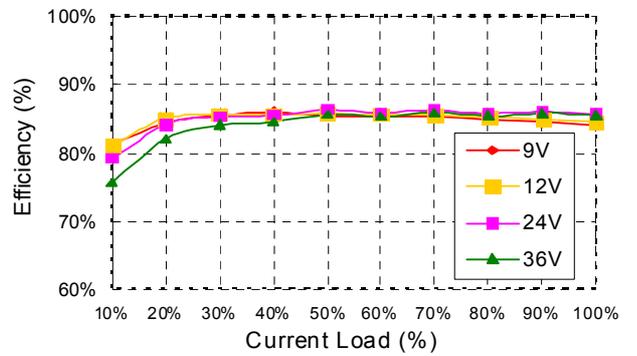


EC5SAW-24S12N (Eff Vs Io)

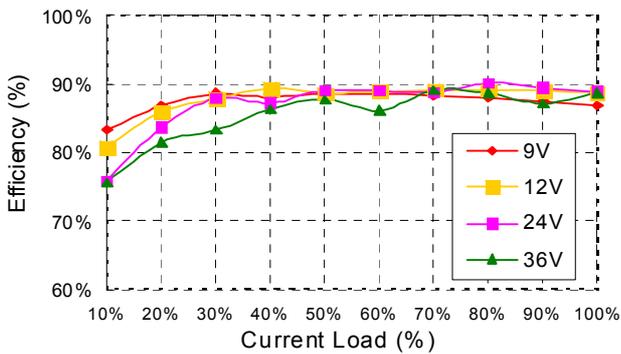


EC5SAW-24S15N (Eff Vs Io)

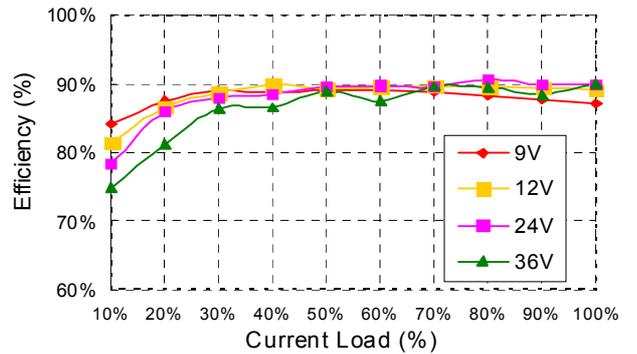

EC5SAW-24D05N (Eff Vs Io)

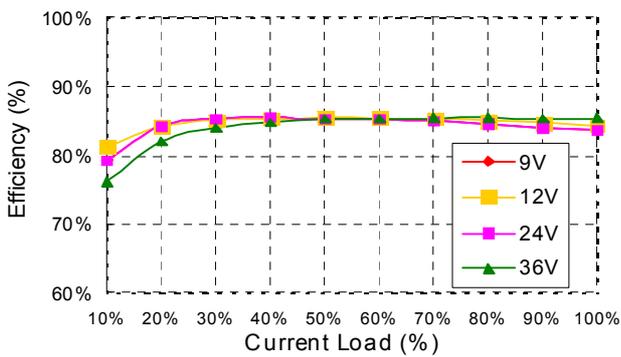

EC5SAW-24D12N (Eff Vs Io)

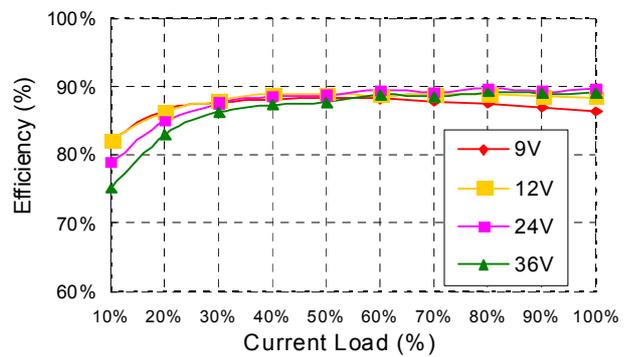





EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019


EC5SAW-24D15N (Eff Vs Io)

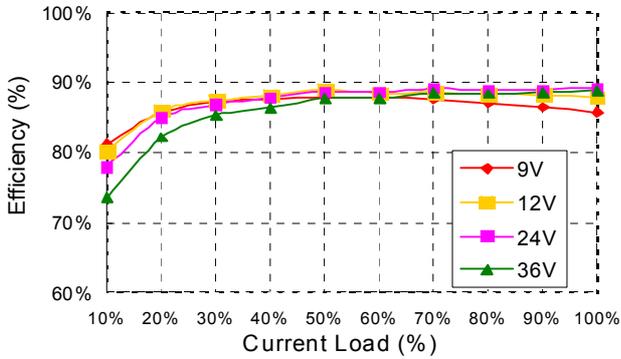


EC5SAW-48S33N (Eff Vs Io)

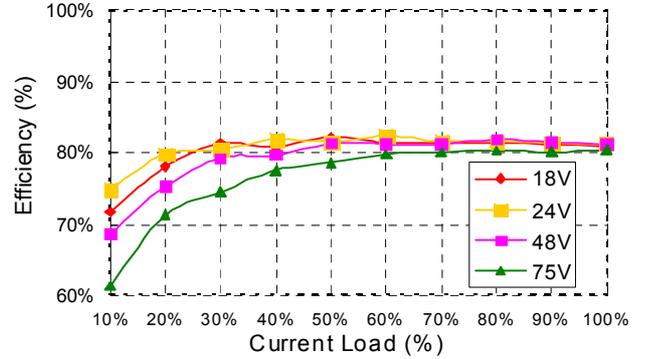


EC5SAW-48S05N (Eff Vs Io)

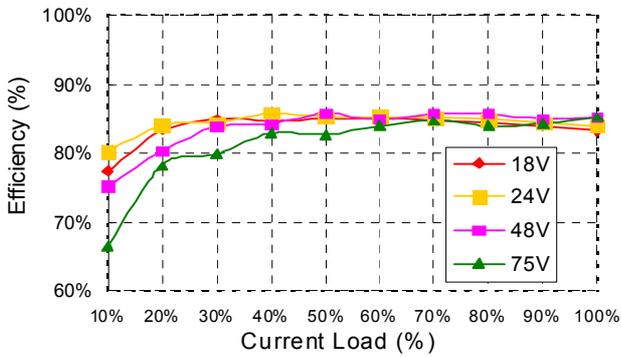


EC5SAW-48S12N (Eff Vs Io)

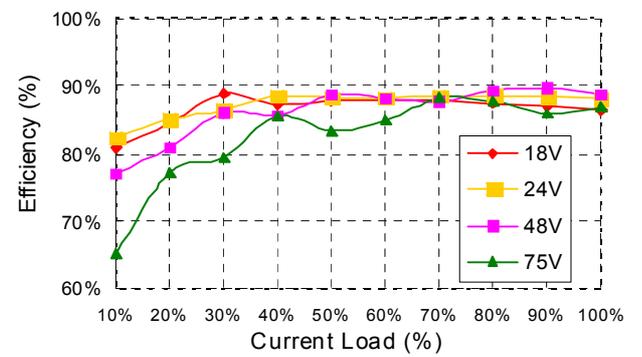

EC5SAW-48S15N (Eff Vs Io)

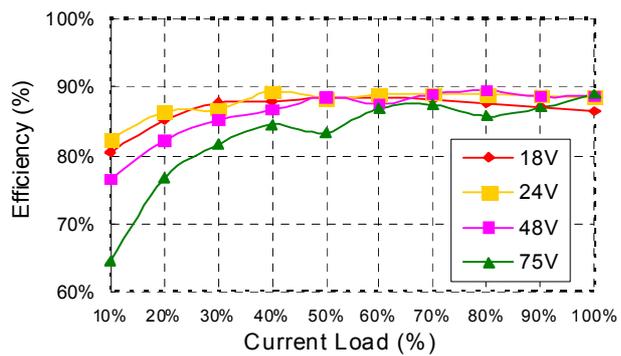

EC5SAW-48D05N (Eff Vs Io)

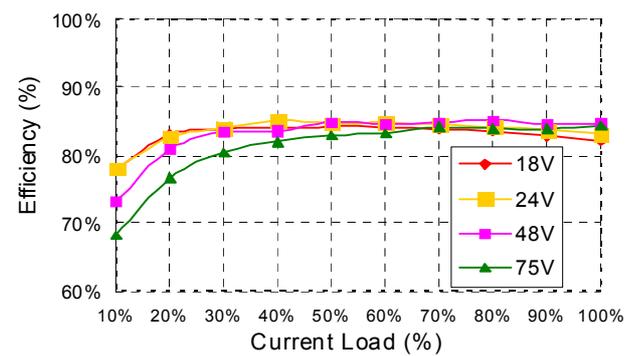





EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

EC5SAW-48D12N (Eff Vs Io)

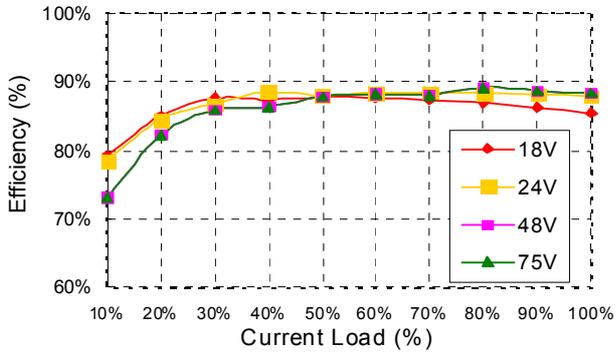


EC5SAW-48D15N (Eff Vs Io)

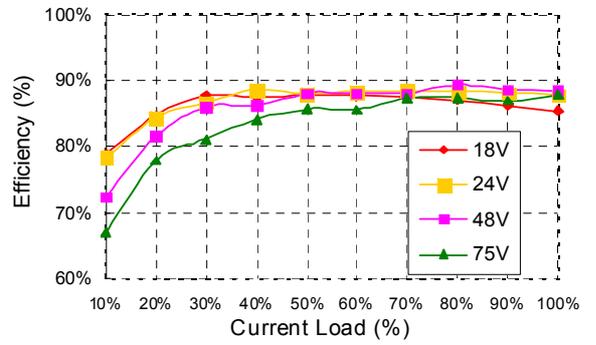



6.5 Input Capacitance at the Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors (Cin) should be placed close to the converter input pins to de-couple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are good choice. Circuit as shown in figure 3 represents typical measurement methods for reflected ripple current. C1 and L1 simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source Inductance (L1).

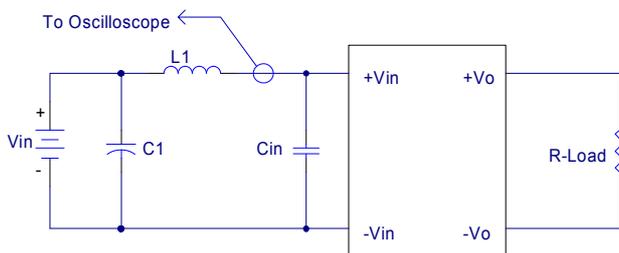

L1: 12uF
 C1: None
 Cin: 47uF ESR<0.7ohm @100KHz

Figure 6 Input Reflected-Ripple Test Setup

6.6 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 5. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation.

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where

Vo is output voltage,
 Io is output current,
 Vin is input voltage,
 Iin is input current.

The value of load regulation is defined as:

$$Load.reg = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where

V_{FL} is the output voltage at full load
 V_{NL} is the output voltage at no load

The value of line regulation is defined as:

$$Line.reg = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where

V_{HL} is the output voltage of maximum input voltage at full load.

V_{LL} is the output voltage of minimum input voltage at full load.


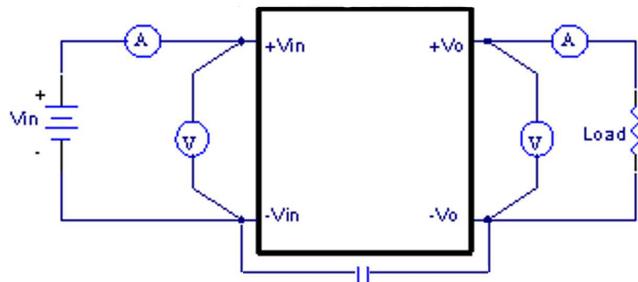


Figure 7 EC5SAW Series Test Setup
 NOTE: -Vin to -Vo With 470pF/250V Y1

6.7 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in figure 8 and 9. A coaxial cable was used to prevent impedance mismatch reflections disturbing the noise readings at higher frequencies. Measurements are taken with output appropriately loaded and all ripple/noise specifications are from 5Hz to 20MHz Band Width.

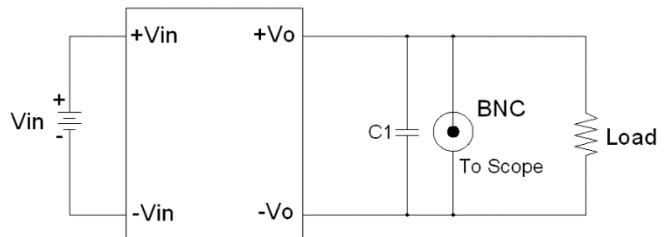

Note: C1: 1uF ceramic capacitor.

Figure 8 Using BNC to measure output ripple and noise

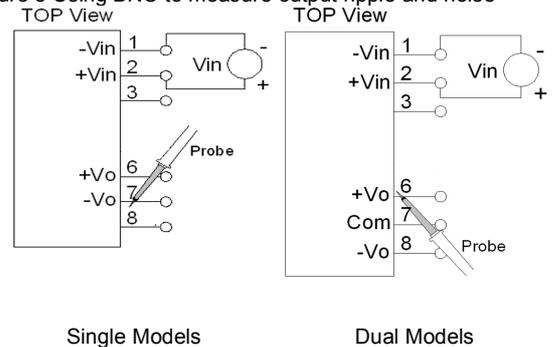


Figure 9 Using Probe to Measure Output Ripple and Noise

6.8 Output Capacitance

The EC5SAW series converters provide unconditional stability with or without external capacitors. For good transient response low ESR output capacitors should be located close to the point of load. These series converters are designed to work with load capacitance to see technical specifications.



7. Safety & EMC

7.1 Input Fusing and Safety Considerations.

The EC5SAW series converters have not an internal fuse. However, to achieve maximum safety and system protection, always use an input line fuse. We recommended a fast acting fuse 3A for 24Vin models and 1.5A for 48Vin modules. Figure 9 circuit is recommended by a Transient Voltage Suppressor diode across the input terminal to protect the unit against surge or spike voltage and input reverse voltage.

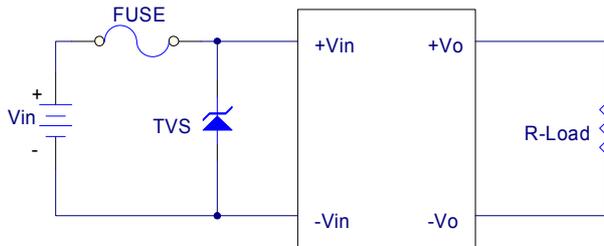


Figure 10 Input Protection

7.2 EMC Considerations

- (1) EMI Test standard: EN55032 Class A/B Conducted Emission
Test Condition: Input Voltage: Nominal, Output Load: Full Load

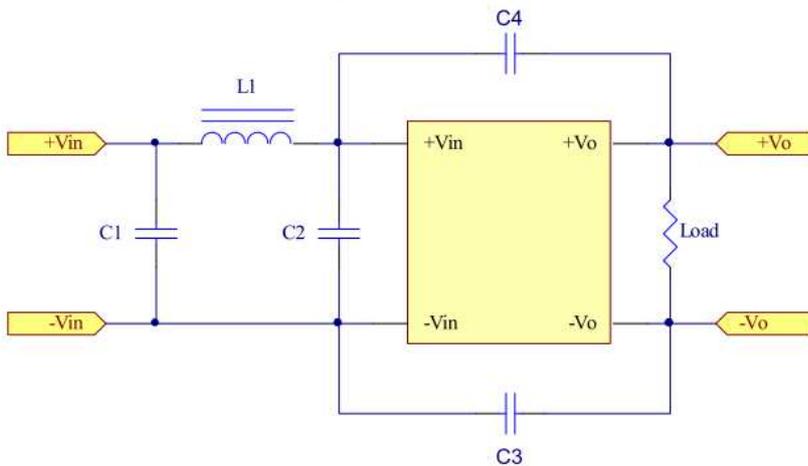


Figure11 Connection circuit for conducted EMI testing



EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019

| Model No. | EN55032 class A | | | EN55032 class B | | |
|---------------|-----------------|----------------|-------|-----------------|-----------------|-------|
| | C1, C2 | C3, C4 | L1 | C1, C2 | C3, C4 | L1 |
| EC5SAW-24S33N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24S05N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24S12N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24S15N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24D05N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24D12N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-24D15N | 10uF/50V 1210 | 330pF/3KV 1808 | 3.9uH | 10uF/50V 1210 | 1000pF/4KV 1808 | 3.9uH |
| EC5SAW-48S33N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48S05N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48S12N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48S15N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48D05N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48D12N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |
| EC5SAW-48D15N | 4.7uF/100V 1812 | 330pF/3KV 1808 | 6.8uH | 4.7uF/100V 1812 | 1000pF/4KV 1808 | 6.8uH |

Note:


All of capacitors are ceramic capacitors

3.9uH (P/N: SR0805-3R9MLB ABC), 6.8uH (P/N: UPIA0604-6R8M 3L)




EC5SAW 6.6-10W Isolated DC-DC Converters


Application Note V10 October 2019

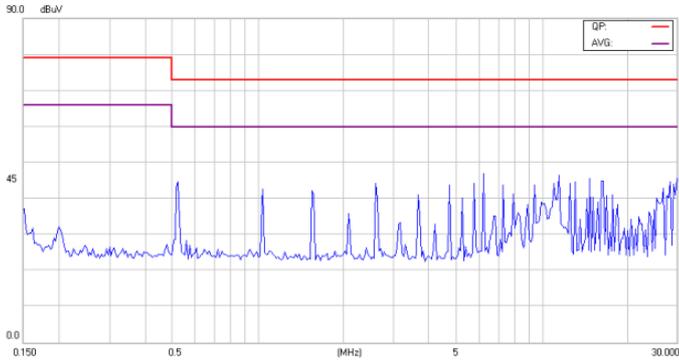


Conducted Class A of EC5SAW-24S33N

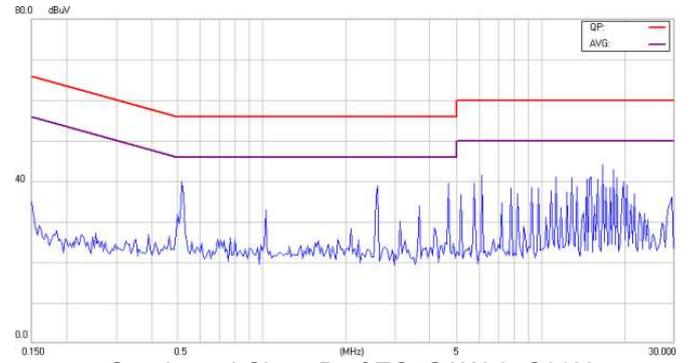


Conducted Class B of EC5SAW-24S33N

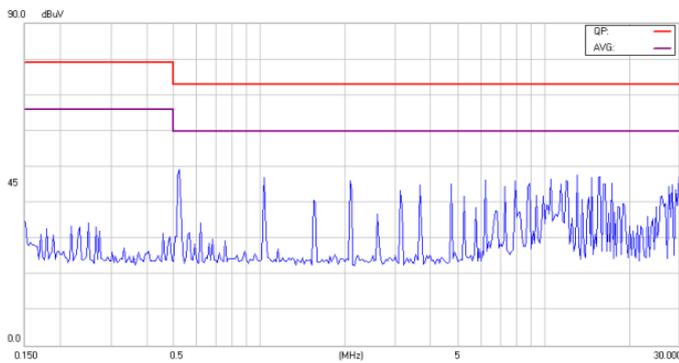


Conducted Class A of EC5SAW -24S05N

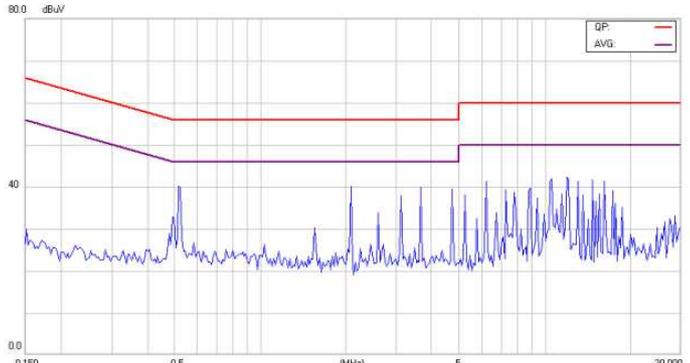

Conducted Class B EC5SAW -24S05N

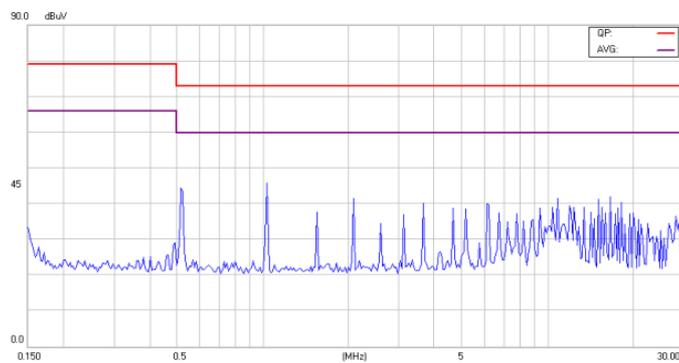


Conducted Class A of EC5SAW -24S12N

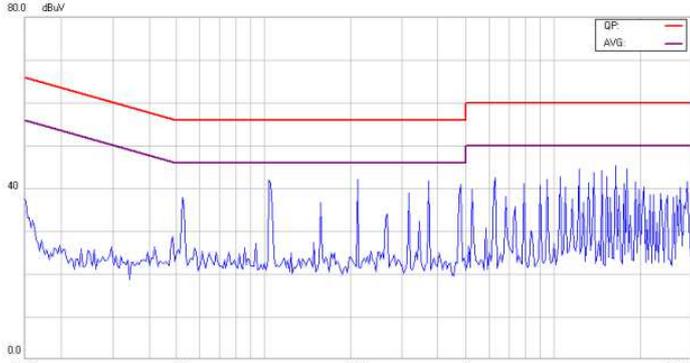

Conducted Class B of EC5SAW -24S12N



Conducted Class A of EC5SAW -24S15N








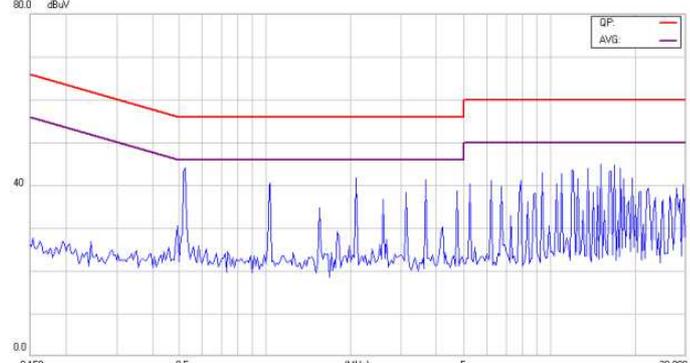


Conducted Class B of EC5SAW -24S15N



EC5SAW 6.6-10W Isolated DC-DC Converters


Application Note V10 October 2019

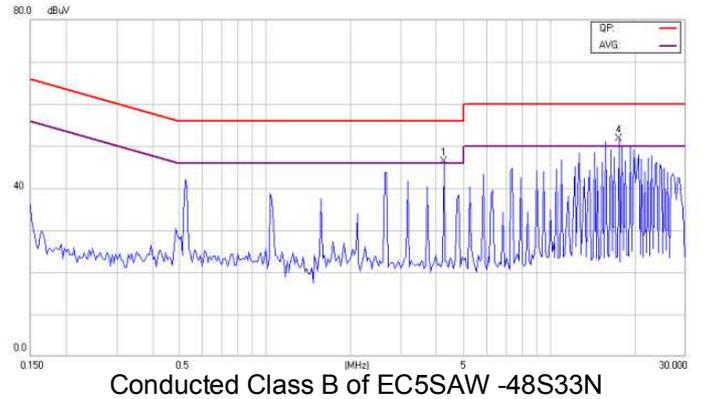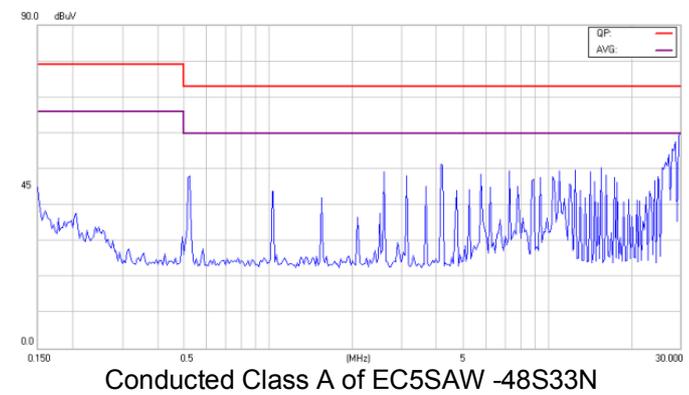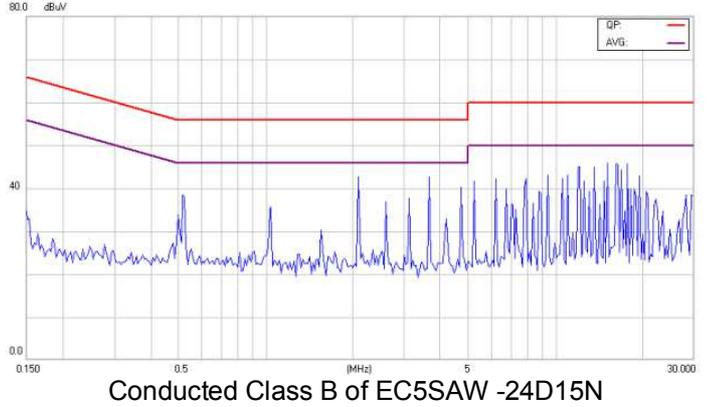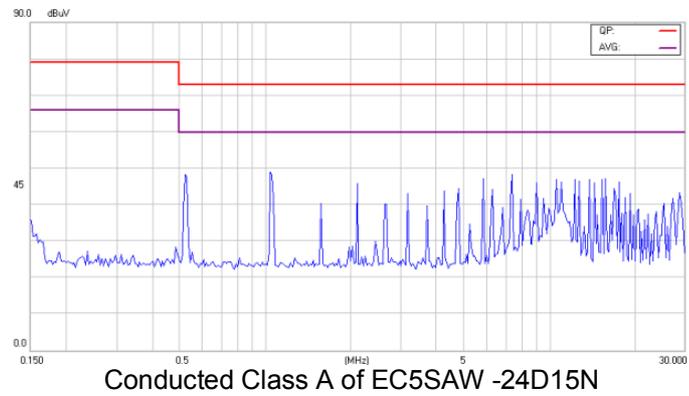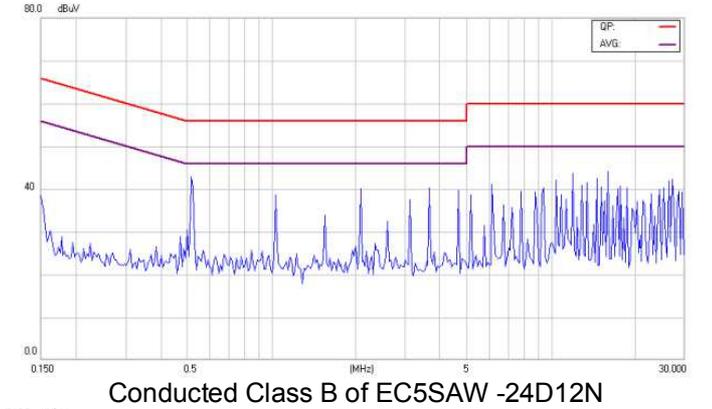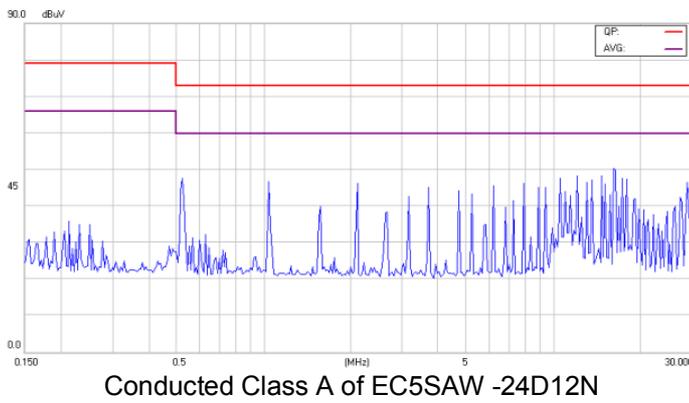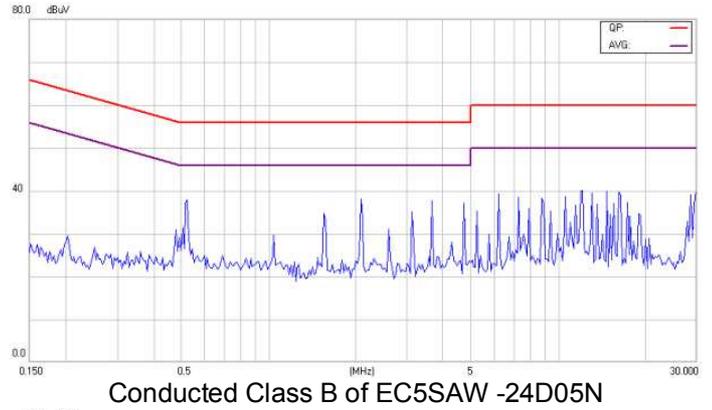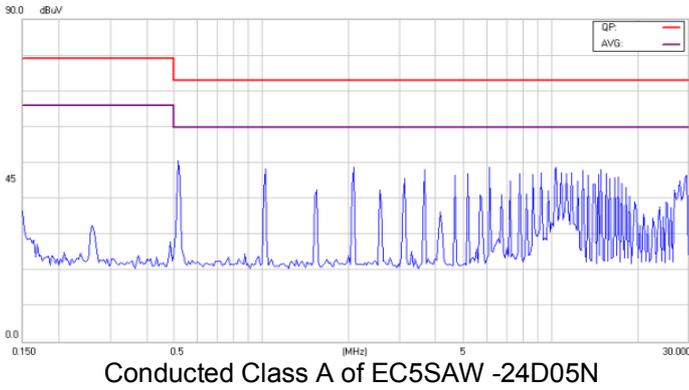




EC5SAW 6.6-10W Isolated DC-DC Converters


Application Note V10 October 2019

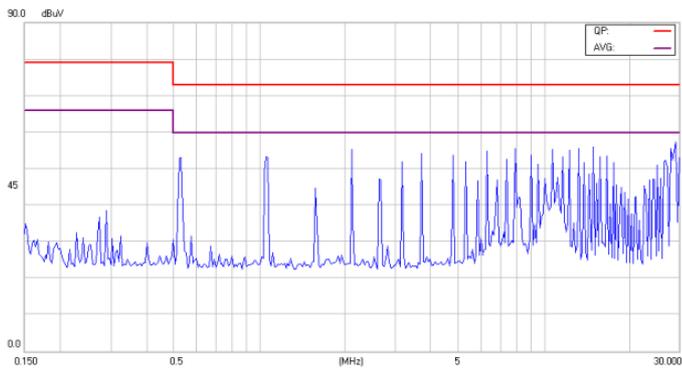


Conducted Class A of EC5SAW -48S05N

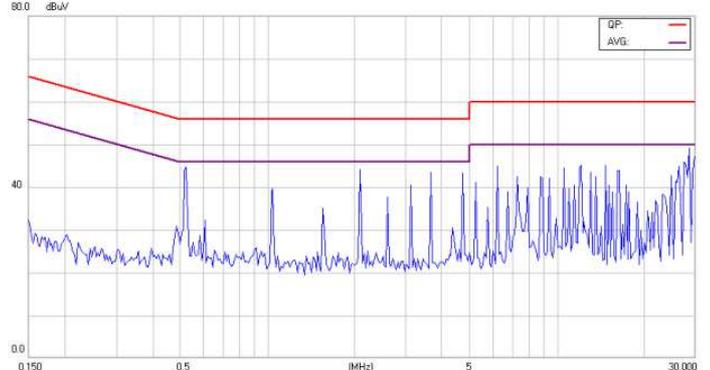


Conducted Class B of EC5SAW -48S05N

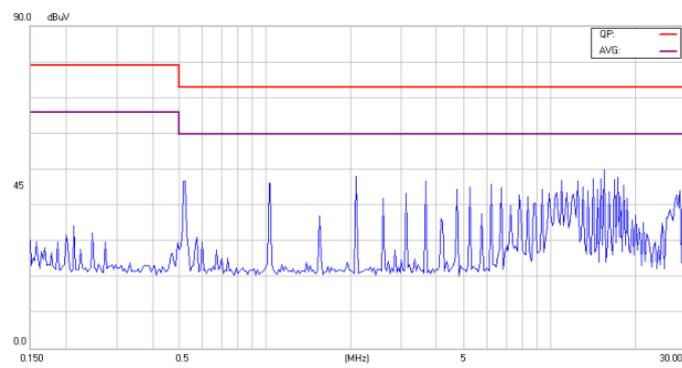


Conducted Class A of EC5SAW -48S12N

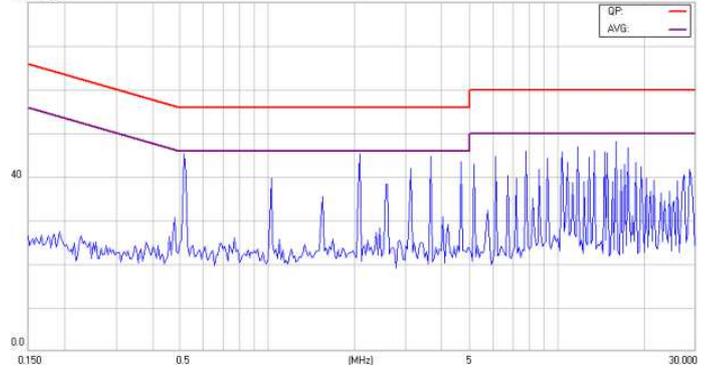


Conducted Class B of EC5SAW -48S12N

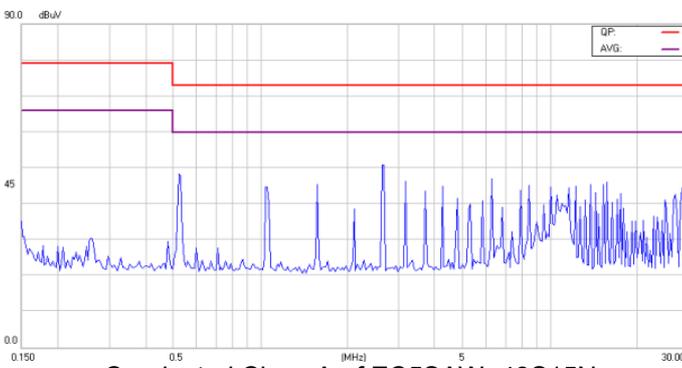


Conducted Class A of EC5SAW -48S15N

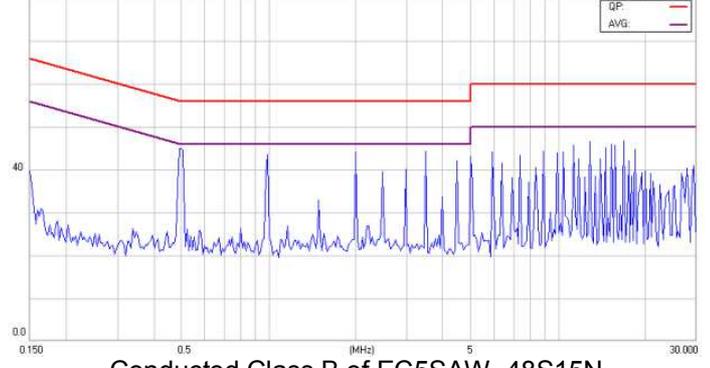

Conducted Class B of EC5SAW -48S15N

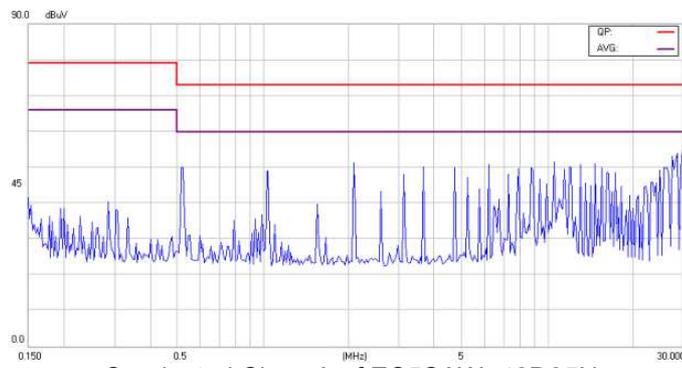

Conducted Class A of EC5SAW -48D05N

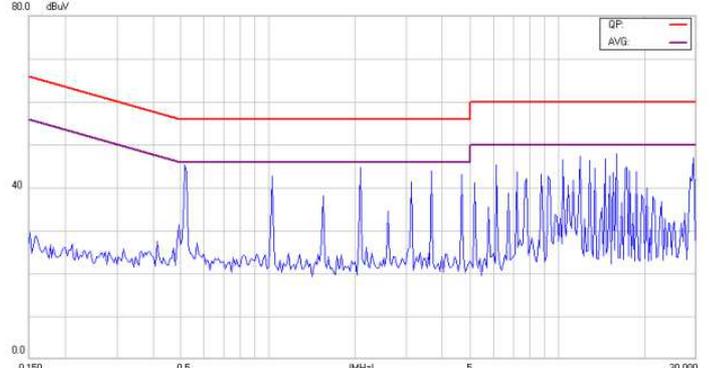


Conducted Class B of EC5SAW -48D05N




EC5SAW 6.6-10W Isolated DC-DC Converters


Application Note V10 October 2019

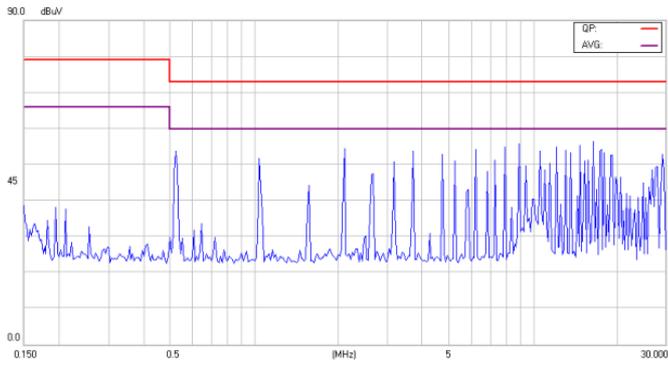


Conducted Class A of EC5SAW-48D12N

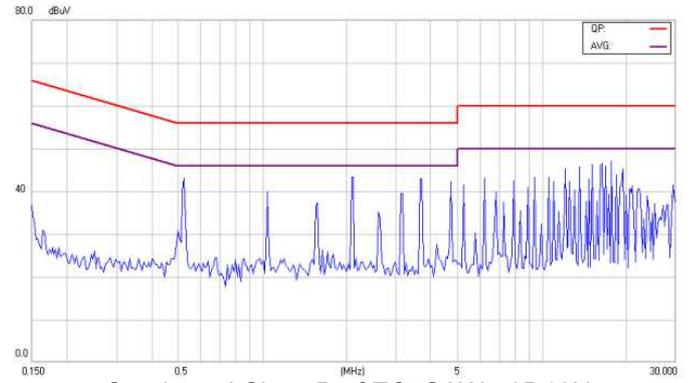

Conducted Class B of EC5SAW-48D12N

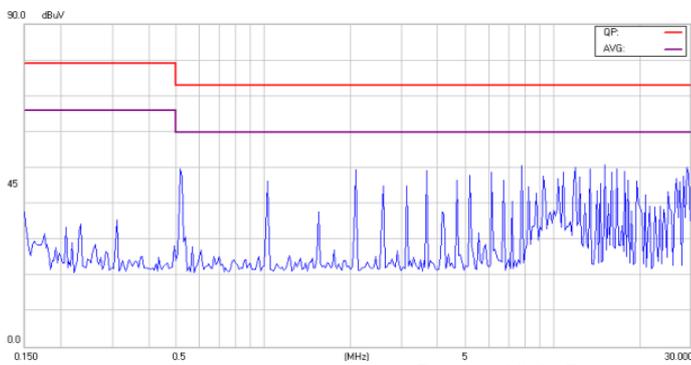

Conducted Class A of EC5SAW-48D15N

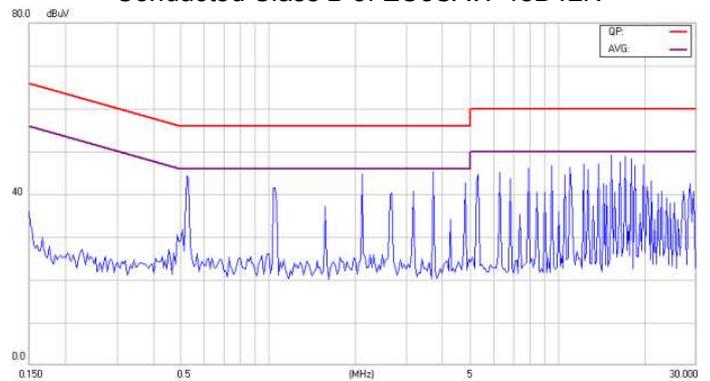

Conducted Class B of of EC5SAW-48D15N




EC5SAW 6.6-10W Isolated DC-DC Converters

Application Note V10 October 2019


8. Part Number

EC5SAW – XX S XX N

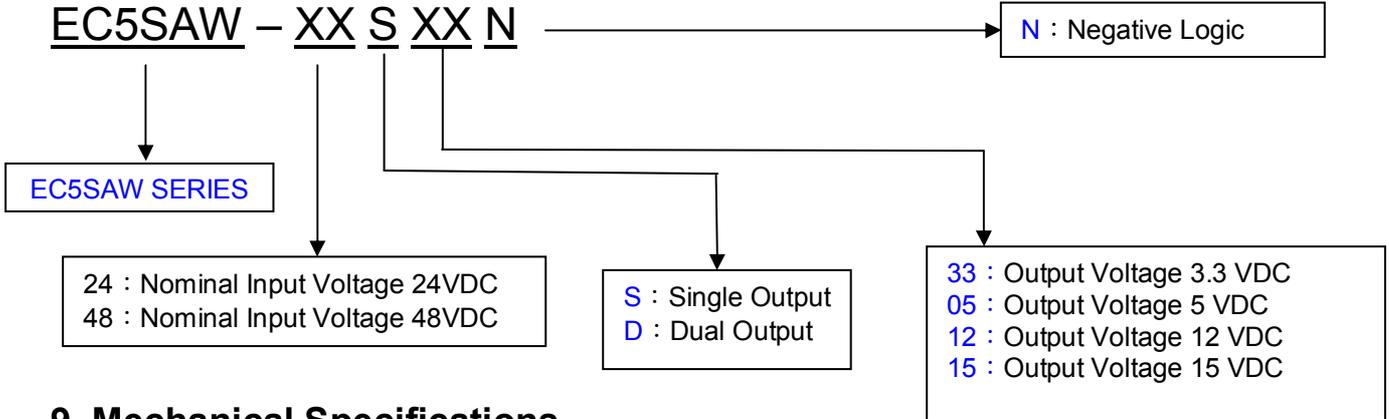

9. Mechanical Specifications

All Dimensions In Inches (mm)
 Tolerances : Inches Millimeters
 X.XX=±0.02 X. X=±0.5
 Pin ±0.002 ±0.05

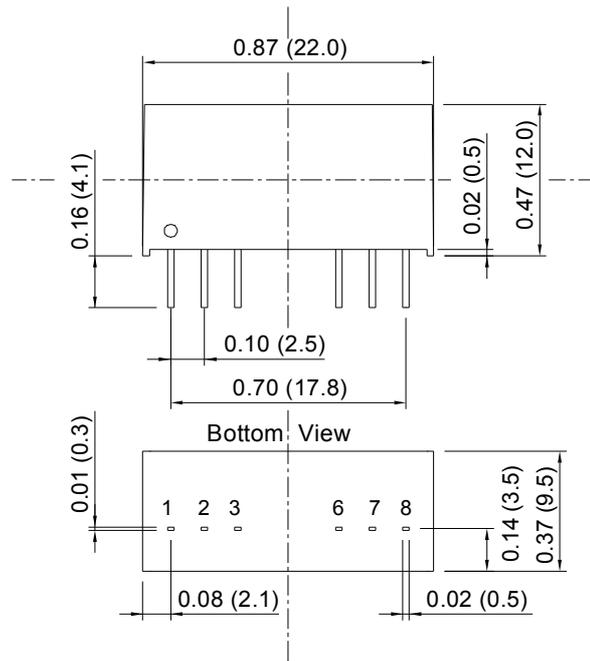

| PIN CONNECTION | | |
|----------------|-----------|-----------|
| Pin | Single | Dual |
| 1 | -V Input | -V Input |
| 2 | +V Input | +V Input |
| 3 | On/Off | On/Off |
| 6 | +V Output | +V Output |
| 7 | -V Output | Common |
| 8 | NC | -V Output |

CINCON ELECTRONICS CO., LTD.

Headquarter Office:

14F, No.306, Sec.4, Hsin Yi Rd.,
 Taipei, Taiwan
 Tel: 886-2-27086210
 Fax: 886-2-27029852
 E-mail: sales@cincon.com.tw
 Web Site: http://www.cincon.com

Factory:

No. 8-1, Fu Kong Rd.,
 Fu Hsing Industrial Park
 Fu Hsing Hsiang, ChangHua Hsien,
 Taiwan
 Tel: 886-4-7690261
 Fax: 886-4-7698031

Cincon American Office:

1655 Mesa Verde Ave, Ste 180,
 Ventura, CA 93003
 Tel: 805-639-3350
 Fax: 805-639-4101
 E-mail: info@cincon.com