



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

ISOLATED DC-DC Converter EC2SB SERIES APPLICATION NOTE



Approved By:

Department	Approved By	Checked By	Written By
Research and Development Department	Enoch	Tim	Joyce
		Jacky	
Quality Assurance Department	Ryan	Benny	



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

Content

1. INTRODUCTION	3
2. DC-DC CONVERTER FEATURES	3
3. ELECTRICAL BLOCK DIAGRAM	3
4. TECHNICAL SPECIFICATIONS	5
5. MAIN FEATURES AND FUNCTIONS	10
5.1 Operating Temperature Range	10
5.2 Over Current Protection	10
5.3 Remote On/Off	10
6. APPLICATIONS	10
6.1 Recommended Layout PCB Footprints and Soldering Information	10
6.2 Power De-Rating Curves for EC2SB Series	11
6.3 Efficiency vs. Load Curves	12
6.4 Input Capacitance at the Power Module	17
6.5 Test Set-Up	17
6.6 Output Voltage Adjustment	17
6.7 Output Ripple and Noise Measurement	18
6.8 Output Capacitance	18
7. SAFETY & EMC	19
7.1 Input Fusing and Safety Considerations.	19
7.2 EMC Considerations	19
8. PART NUMBER	25
9. MECHANICAL SPECIFICATIONS	25



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

1. Introduction

The EC2SB series offer 10 watts of output power in a 1.00x1.00x0.4 inches Copper packages. The EC2SB series has a 2:1 wide input voltage range of 4.7-9, 9-18, 18-36 and 36-75VDC and provides a precisely regulated output. This series has features such as high efficiency, 1500VDC of isolation and allows an ambient operating temperature range of -40°C to 85°C (de-rating above 71 °C). The features include short circuit protection and remote on/off control. All models are very suitable for distributed power architectures, telecommunications, battery operated equipment and industrial applications.

2. DC-DC Converter Features

- 10W Isolated Output
- Efficiency to 87%
- 2:1 Input Range
- Regulated Outputs
- Fixed Switching Frequency
- Input under-voltage Protection
- Over Current Protection
- Remote On/Off
- Continuous Short Circuit Protection
- Conductive EMI Meets EN55032 Class A
- Without Tantalum Capacitors Inside
- Safety Meets IEC/EN/UL 62368-1

3. Electrical Block Diagram

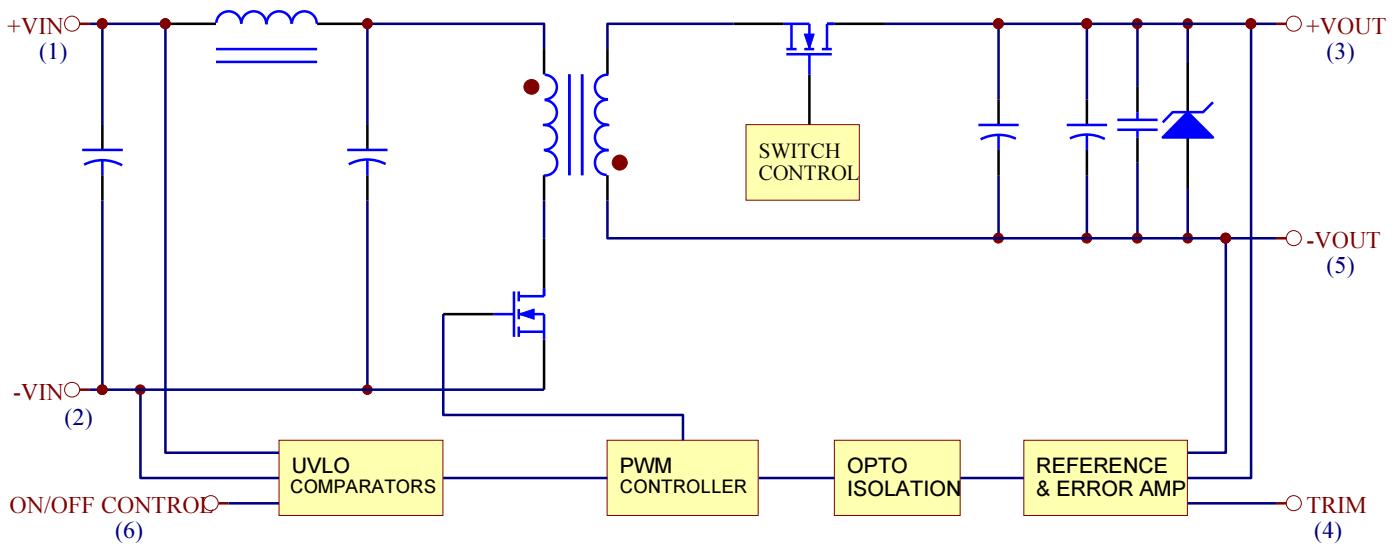


Figure 1 Electrical Block Diagram for Single Output Modules



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

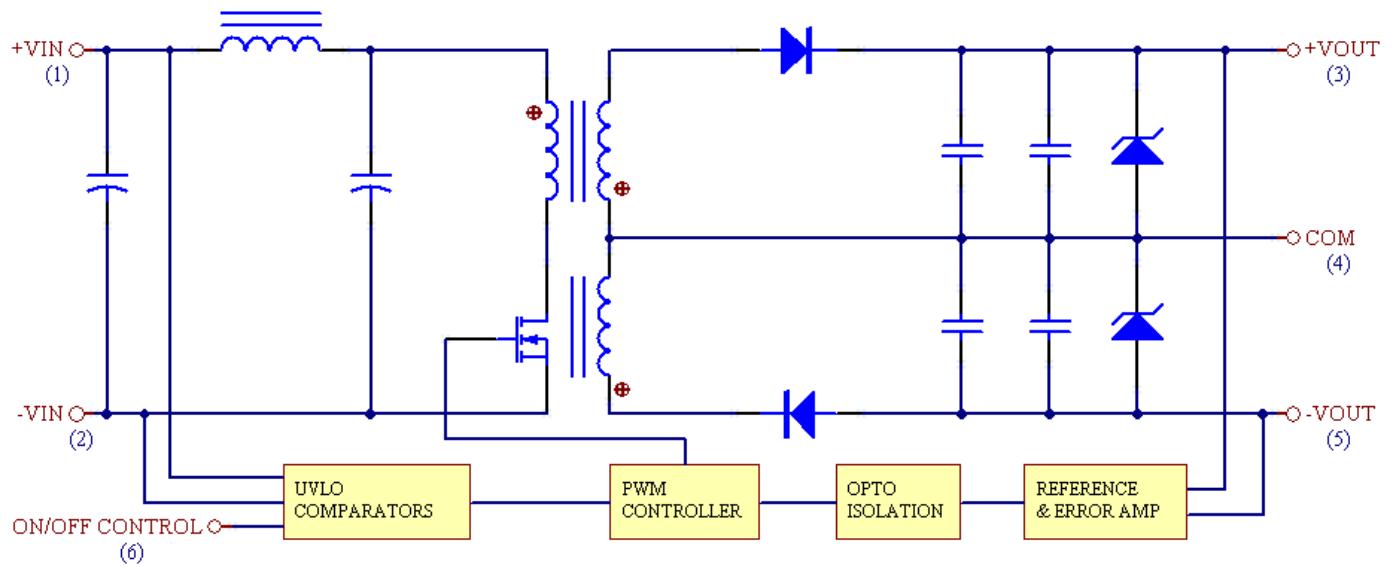


Figure 2 Electrical Block Diagram for Dual Output Modules



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

4. Technical Specifications

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Input Voltage						
Continuous		05SXX	-0.3		9	Vdc
		12SXX	-0.3		18	
		24SXX	-0.3		36	
		48SXX	-0.3		75	
Transient	100ms	05SXX			12	Vdc
		12SXX			25	
		24SXX			50	
		48SXX			100	
Operating Ambient Temperature	De-rating, Above 71°C	All	-40		+85	°C
Case Temperature		All			105	°C
Storage Temperature		All	-55		+125	°C
Input/Output Isolation Voltage	1 minute	All	1500			Vdc

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Operating Input Voltage		05SXX	4.7	5	9	Vdc
		12SXX	9	12	18	
		24SXX	18	24	36	
		48SXX	36	48	75	
Turn-On Voltage Threshold		05SXX	4.2	4.4	4.6	Vdc
		12SXX	8.4	8.8	9.2	
		24SXX	16.5	17	17.5	
		48SXX	33.5	34	34.5	
Turn-Off Voltage Threshold		05SXX	4	4.2	4.4	Vdc
		12SXX	7.7	8	8.3	
		24SXX	15.5	16	16.7	
		48SXX	31.5	32	32.5	
Lockout Hysteresis Voltage		05SXX		0.3		Vdc
		12SXX		0.5		
		24SXX		1		
		48SXX		1		
Maximum Input Current	100% Load, Vin=4.7V for 05XXX	05SXX			2700	mA
	100% Load, Vin=9V for 12XXX	12SXX			1350	
	100% Load, Vin=18V for 24XXX	24SXX			675	
	100% Load, Vin=36V for 48XXX	48SXX			338	



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units	
No-Load Input Current	Vin=Nominal input	05S33 05S05 05S12 05S15 05D05 05D12 05D15 12S33 12S05 12S12 12S15 12D05 12D12 12D15 24S33 24S05 24S12 24S15 24D05 24D12 24D15 48S33 48S05 48S12 48S15 48D05 48D12 48D15		120 120 50 50 50 50 50 30 30 30 35 45 45 45 25 25 25 25 25 25 25 20 20 20 20 20 20 20			mA
Inrush Current (I^2t)		All			0.1	A ² s	
Input Reflected-Ripple Current	P-P thru 12uH inductor, 5Hz to 20MHz	All			30	mA	

OUTPUT CHARACTERISTIC

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Set Point	Vin=Nominal Vin , Io=Io.max, Tc=25°C	Vo=3.3V Vo=5.0V Vo=12V Vo=15V Vo=±5V Vo=±12V Vo=±15V	3.2505 4.925 11.82 14.77 4.925 11.82 14.77	3.3 5.0 12 15 5.0 12 15	3.3495 5.075 12.18 15.225 5.075 12.18 15.225	Vdc



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Regulation						
Load Regulation	Io=Io.min to Io.max	DIP Single			±0.2	%
		SMD Single			±0.5	
		Dual			±1.0	
Line Regulation	Vin=low line to high line	DIP Single			±0.2	%
		SMD Single			±0.3	
		Dual			±0.5	
Temperature Coefficient	Tc=-40°C to 85°C	All			±0.03	%/°C
Output Voltage Ripple and Noise	20MHz bandwidth					
Peak-to-Peak	Full Load	DIP			50	mV
		SMD			100	
Operating Output Current Range		Vo=3.3V			2.5	A
		Vo=5.0V			2	
		Vo=12V			0.833	
		Vo=15V			0.666	
		Vo=±5V			±1	
		Vo=±12V			±0.416	
		Vo=±15V			±0.333	
Output DC Current-Limit Inception	Output Voltage =90% Vo _{nominal}	All	110	130	140	%
Maximum Output Capacitance	Full load, Resistance	Vo=3.3V			2470	uF
		Vo=5.0V			2000	
		Vo=12V			940	
		Vo=15V			690	
		Vo=±5V			1000	
		Vo=±12V			440	
		Vo=±15V			330	

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Output Voltage Current Transient	0.1A/us					
Step Change in Output Current	50% to 75% and 75% to 100% of Io.max	All			±4	%
Setting Time (within 1% Vo _{nominal})	di/dt=0.1A/us	All			500	us
Turn-On Delay and Rise Time						
Turn-On Delay Time, From On/Off Control	Von/off to 10%Vo, set	All		10		ms
Turn-On Delay Time, From Input	Vin,min. to 10%Vo, set	All		10		ms
Output Voltage Rise Time	10%Vo, set to 90%Vo, set	All		5		ms



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
100% Load	5V Output	05S33		87		
		05S05		87		
		05S12		87		
		05S15		87		
		05D05		85		
		05D12		87		
		05D15		87		
	12V Output	12S33		82		
		12S05		85		
		12S12		87		
		12S15		87		
		12D05		85		
		12D12		87		
		12D15		87		
	24V Output	24S33		82		
		24S05		85		
		24S12		87		
		24S15		87		
		24D05		85		
		24D12		87		
		24D15		87		
	48V Output	48S33		81		
		48S05		85		
		48S12		87		
		48S15		87		
		48D05		85		
		48D12		87		
		48D15		87		

ISOLATION CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Input to Output	1 minutes	All	1500			Vdc
Isolation Resistance		All			1000	MΩ
Isolation Capacitance		All		1000		pF

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
Switching Frequency		All		350		KHz



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
On/Off Control, Positive Remote On/Off logic						
Logic Low (Module Off)	Von/off at I _{on/off} =1.0mA	All	0		1.2	V
Logic High (Module On)	Von/off at I _{on/off} =0.1uA	All	5.5 or open circuit		75	V
On/Off Control, Negative Remote On/Off logic						
Logic High (Module On)	Von/off at I _{on/off} =1.0mA	All		N/A		V
Logic Low (Module Off)	Von/off at I _{on/off} =0.0uA	All		N/A		V
On/Off Current (for both remote on/off logic)	I _{on/off} at V _{on/off} =0.0V	All			1	mA
Leakage Current (for both remote on/off logic)	Logic High, V _{on/off} =15V	All			30	uA
Off Converter Input Current	Shutdown input idle current	5Vin			5	mA
		24Vin			10	
Output Voltage Trim Range	P _{out} =max rated power	48Vin			15	%
		12Vin			10	
Output Over Voltage Protection		V _o =3.3V			3.9	V
		V _o =5.0V			6.2	
		V _o =12V			15	
		V _o =15V			18	
		V _o =±5V			±6.2	
		V _o =±12V			±15	
		V _o =±15V			±18	
Over-Temperature Shutdown		All		N/A		°C

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typical	Max.	Units
MTBF	I _o =100% of I _{o_max} ; Ta=25°C per MIL-HDBK-217F Notice 1 GB	All		1.2		M hours
Weight		All		18		grams



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

5. Main Features and Functions

5.1 Operating Temperature Range

The EC2SB series converters can be operated by a wide ambient temperature range from -40°C to 85°C (de-rating above 71°C). The standard model has a Copper case and case temperature can not over 105°C at normal operating.

5.2 Over Current Protection

All different voltage models have full continuous short-circuit protection. To provide protection in a fault condition, the unit is equipped with internal over-current protection. The unit operates normally once the fault condition is removed. At the point of current-limit inception, the converter will go into over current protection.


5.3 Remote On/Off

The EC2SB series allows the user to switch the module on and off electronically with the remote on/off feature. All models are available in "positive logic" versions. The converter turns on if the remote on/off pin is high (>5.5Vdc to 75Vdc or open circuit). Setting the pin low (0 to <1.2Vdc) will turn the converter off. The signal level of the remote on/off input is defined with respect to ground. If not using the remote on/off pin, leave the pin open (converter will be on).

6. Applications


6.1 Recommended Layout PCB Footprints and Soldering Information

The system designer or the end user must ensure that other components and metal in the vicinity of the converter meet the spacing requirements to which the system is approved. Low resistance and low inductance PCB layout traces are the norm and should be used where possible. Due consideration must also be given to proper low impedance tracks between power module, input and output grounds. The recommended footprints and soldering profiles are shown as Figure 3.

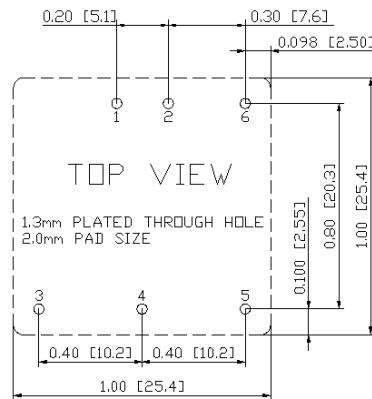

Note: Dimensions are in inches (millimeters)

Lead Free Wave Soldering Profile

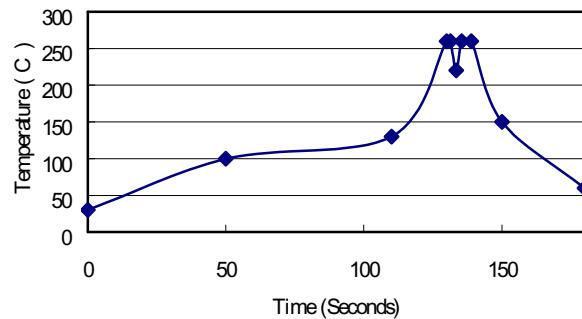

Note :

1. Soldering Materials: Sn/Cu/Ni
2. Ramp up rate during preheat: 1.4 °C/Sec (From 50°C to 100°C)
3. Soaking temperature: 0.5 °C/Sec (From 100°C to 130°C), 60±20 seconds
4. Peak temperature: 260°C, above 250°C 3~6 Seconds
5. Ramp up rate during cooling: -10.0 °C/Sec (From 260°C to 150°C)

Figure3 Recommended PCB Layout Footprints and Wave Soldering Profiles for SB packages




EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

6.2 Power De-Rating Curves for EC2SB Series

Operating Ambient temperature Range: -40°C ~ 71°C without de-rating.

Maximum case temperature under any operating condition should not exceed 105°C.






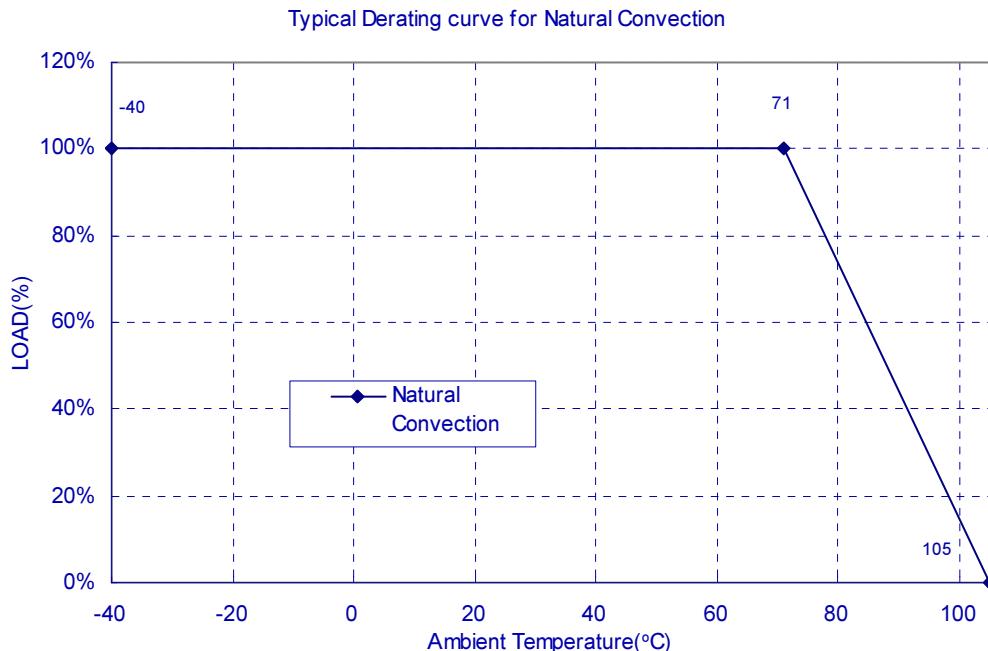




EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020







6.3 Efficiency vs. Load Curves

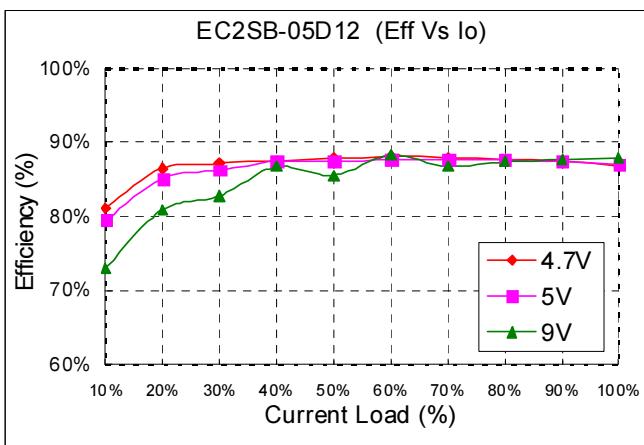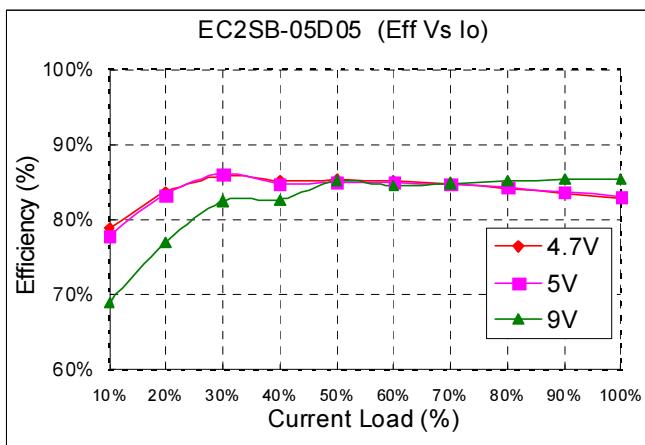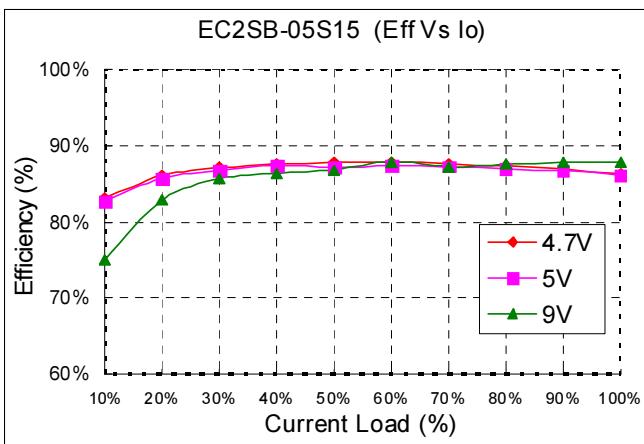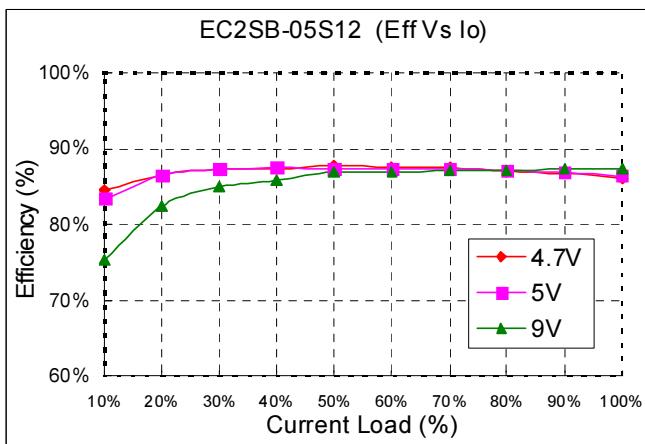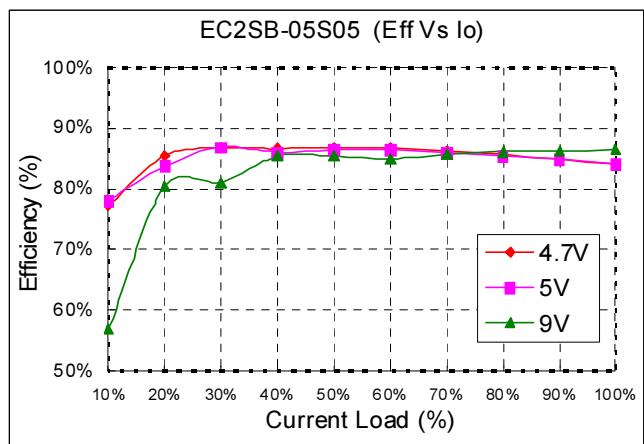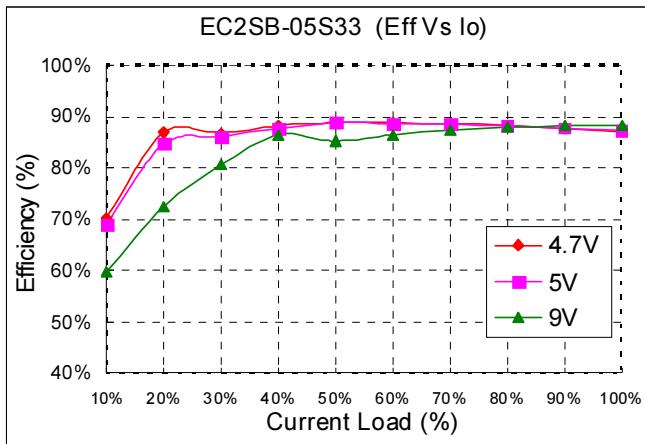



EC2SB 10W Isolated DC-DC Converters







Application Note V12 November 2020

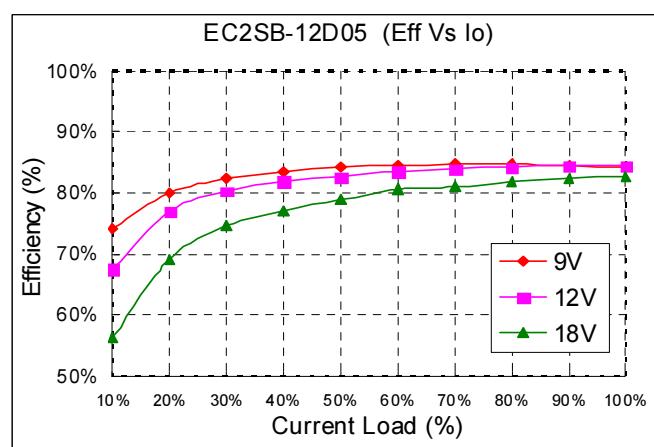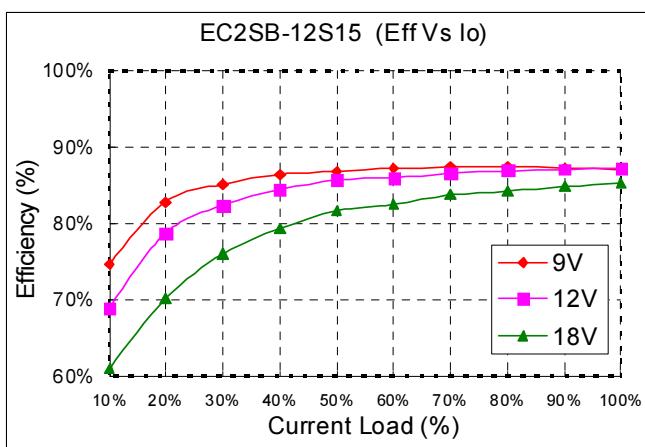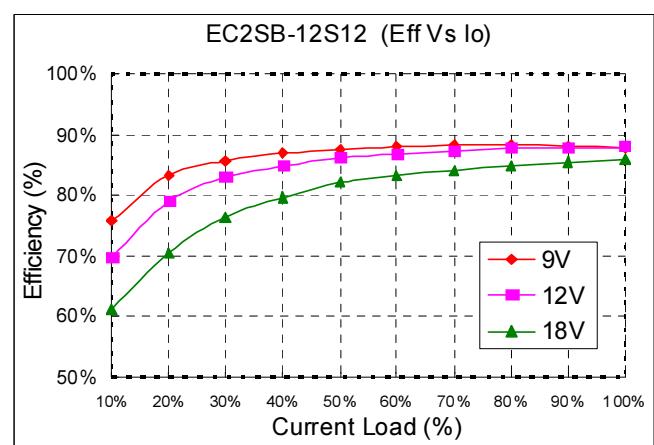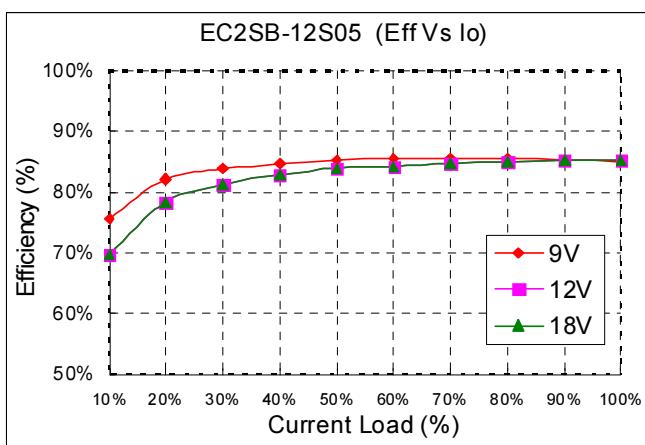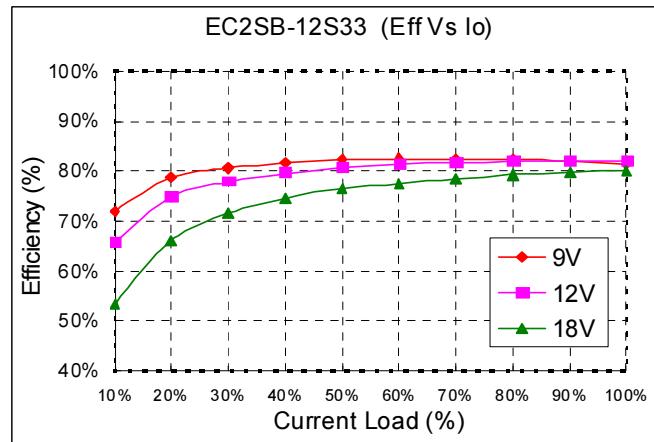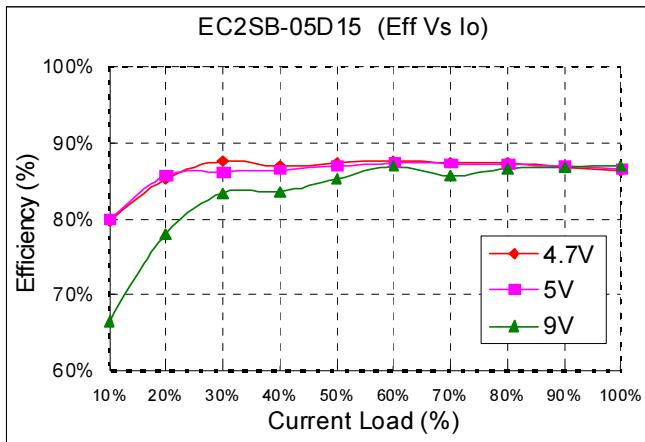



EC2SB 10W Isolated DC-DC Converters







Application Note V12 November 2020

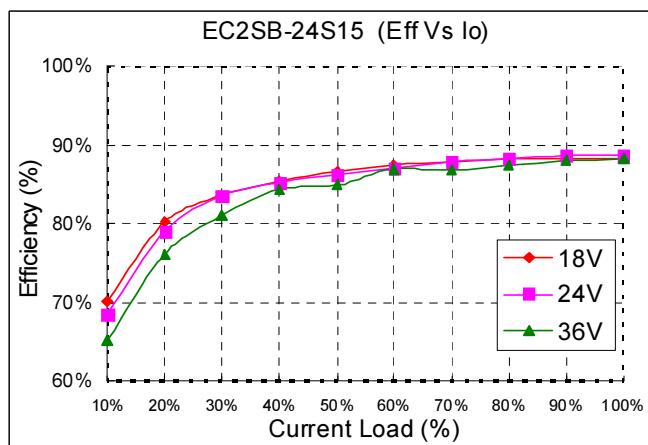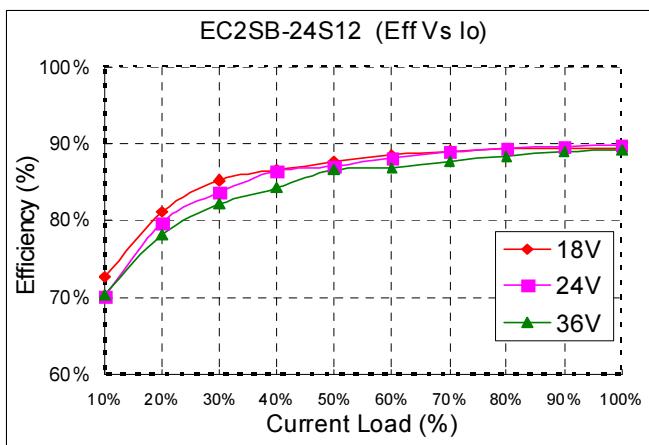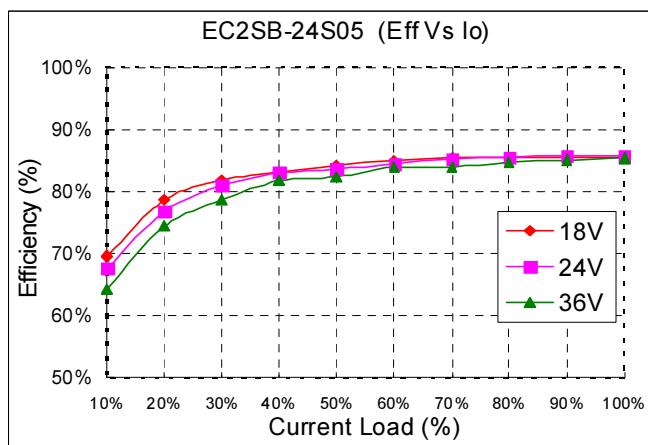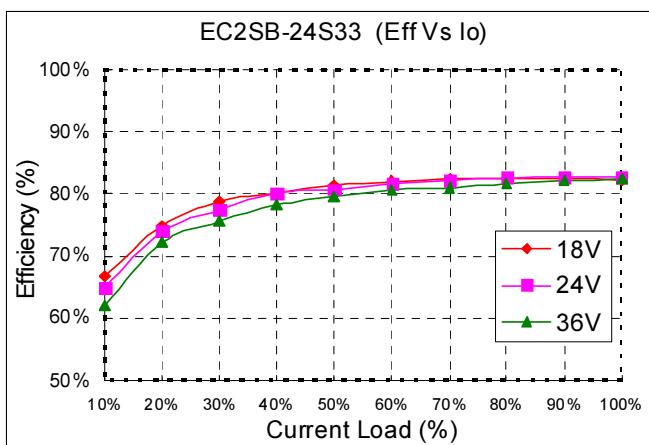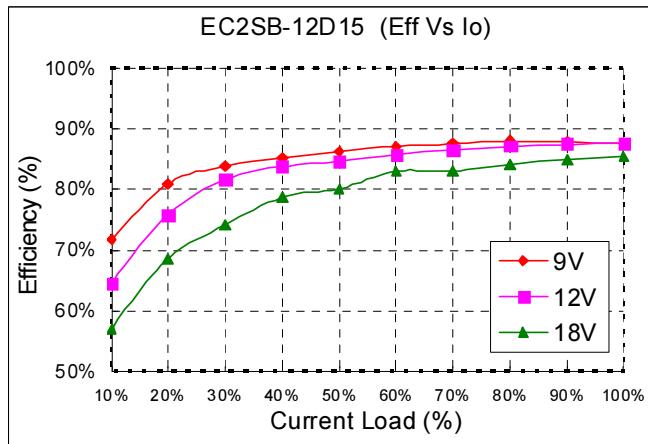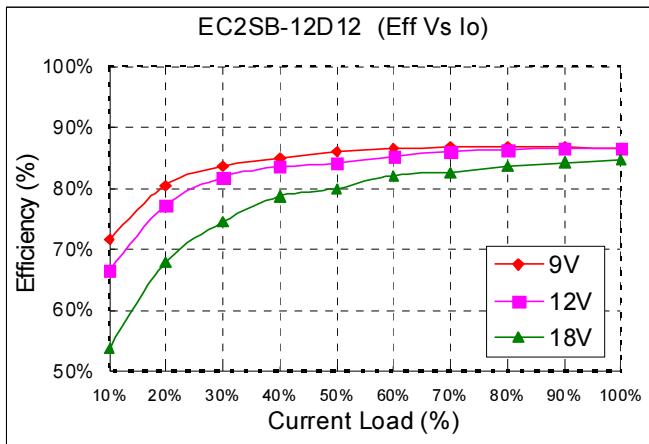



EC2SB 10W Isolated DC-DC Converters





Application Note V12 November 2020

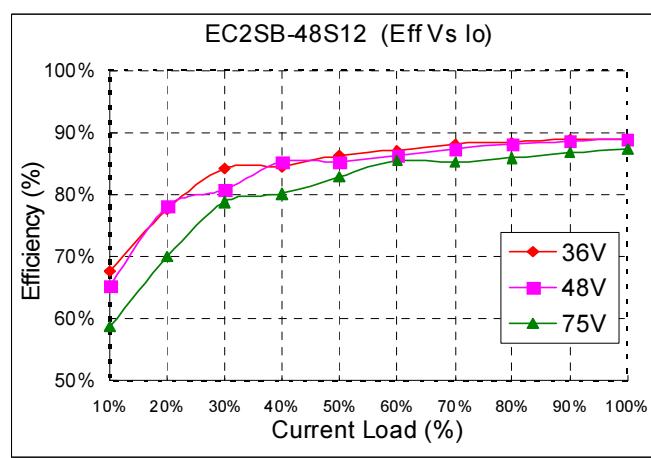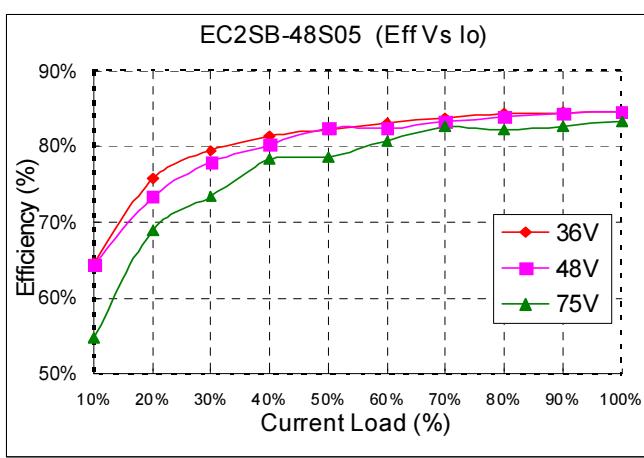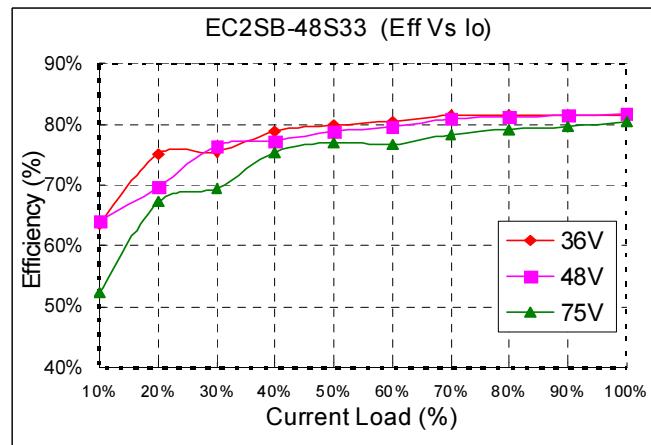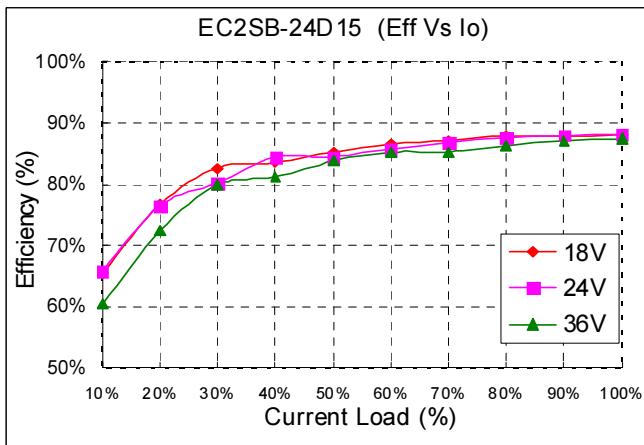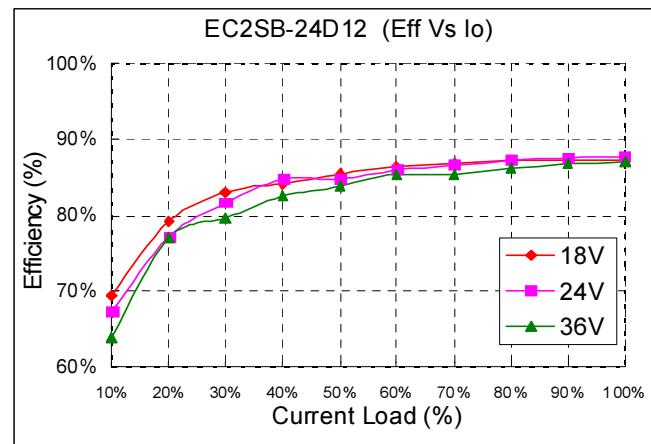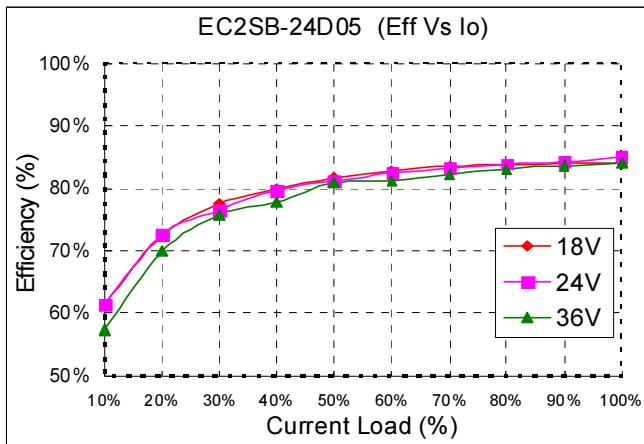



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

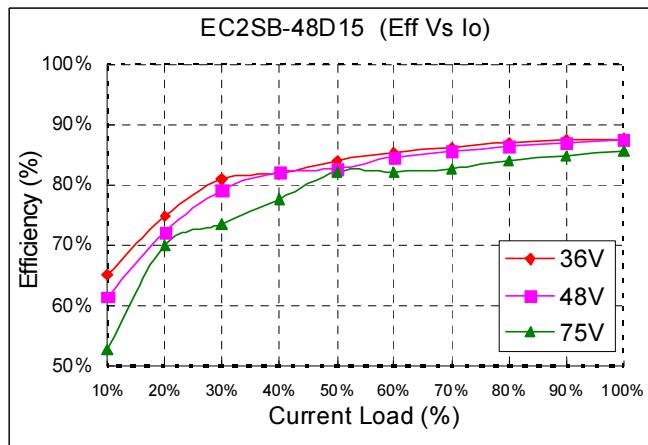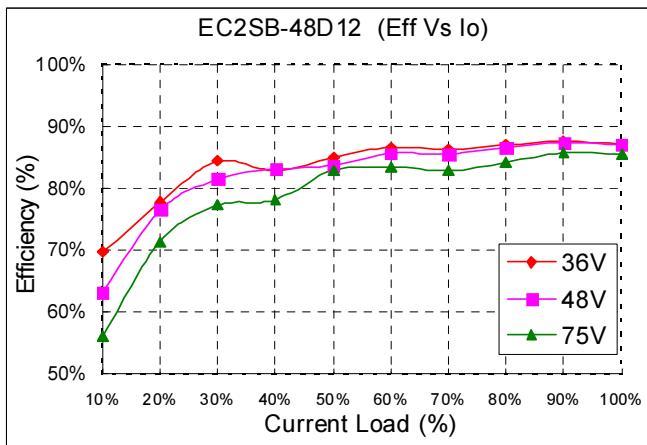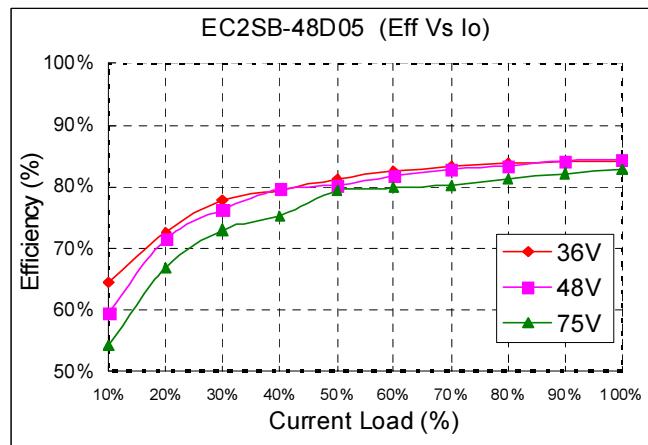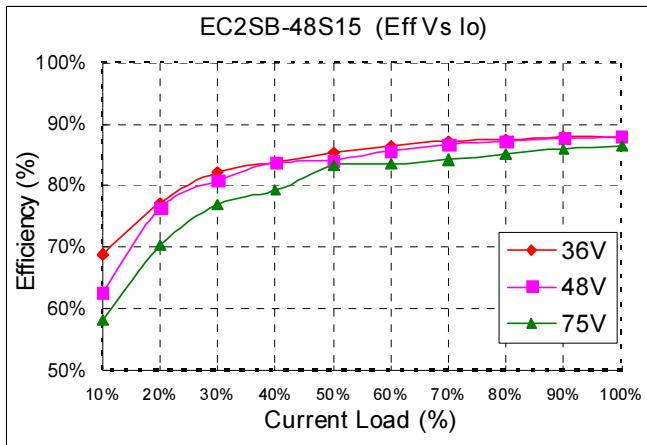




EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

6.4 Input Capacitance at the Power Module

The converters must be connected to low AC source impedance. To avoid problems with loop stability source inductance should be low. Also, the input capacitors (C_{in}) should be placed close to the converter input pins to de-couple distribution inductance. However, the external input capacitors are chosen for suitable ripple handling capability. Low ESR capacitors are good choice. Circuit as shown in Figure 4 represents typical measurement methods for reflected ripple current. C_1 and L_1 simulate a typical DC source impedance. The input reflected-ripple current is measured by current probe to oscilloscope with a simulated source inductance (L_1).

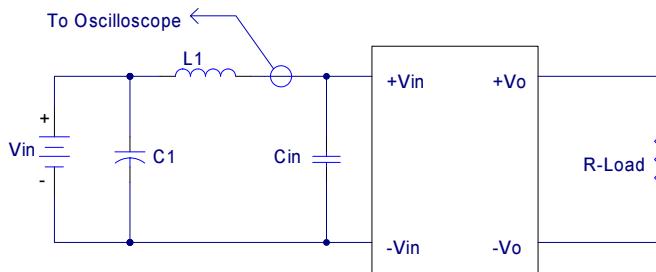

L1: 10uH

C1: None

Cin: 22uF ESR<0.66ohm @100KHz

Figure4 Input Reflected-Ripple Test Setup

6.5 Test Set-Up

The basic test set-up to measure parameters such as efficiency and load regulation is shown in Figure 5. When testing the modules under any transient conditions please ensure that the transient response of the source is sufficient to power the equipment under test. We can calculate the

- Efficiency
- Load regulation and line regulation.

The value of efficiency is defined as:

$$\eta = \frac{V_o \times I_o}{V_{in} \times I_{in}} \times 100\%$$

Where

V_o is output voltage

I_o is output current

V_{in} is input voltage

I_{in} is input current

The value of load regulation is defined as:

$$Load.\text{reg} = \frac{V_{FL} - V_{NL}}{V_{NL}} \times 100\%$$

Where

V_{FL} is the output voltage at full load

V_{NL} is the output voltage at 10% load

The value of line regulation is defined as:

$$Line.\text{reg} = \frac{V_{HL} - V_{LL}}{V_{LL}} \times 100\%$$

Where:

V_{HL} is the output voltage of maximum input voltage at full load.

V_{LL} is the output voltage of minimum input voltage at full load.

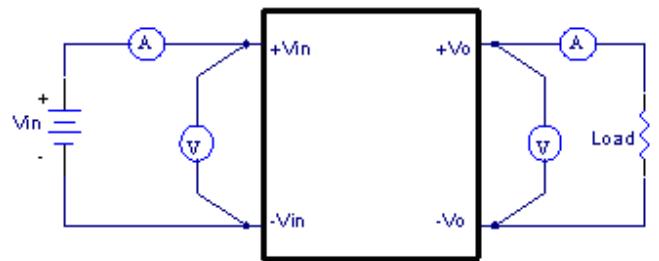


Figure5 EC2SB Series Test Setup

6.6 Output Voltage Adjustment

In order to trim the voltage up or down one needs to connect the trim resistor either between the trim pin and -Vo for trim-up and between trim pin and +Vo for trim-down. The output voltage trim range is $\pm 10\%$. This is shown in Figures 1 and 2:

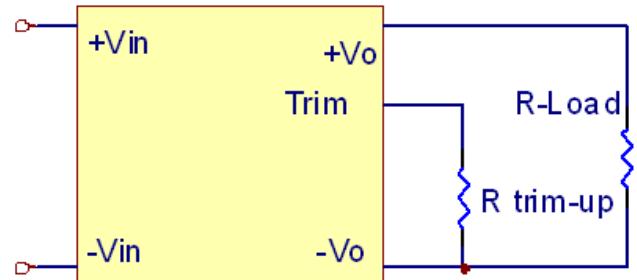


Figure1. Trim-up Voltage Setup

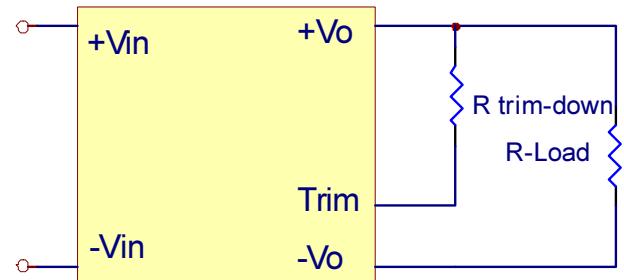


Figure2. Trim-down Voltage Setup

1. The value of $R_{trim-up}$ defined as:

$$R_{trim-up} = \left(\frac{V_r \times R1 \times (R2 + R3)}{(V_o - V_{o,nom}) \times R2} \right) - R_t \quad (\text{K}\Omega)$$



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

Where:

R trim-up is the external resistor in Kohm.

Vo,nom is the nominal output voltage.

Vo is the desired output voltage.

R1, Rt, R2, R3 and Vr are internal to the unit and are

Defined in Table 1.

Model Number	Output Voltage(V)	R1 (Kohm)	R2 (Kohm)	R3 (Kohm)	Rt (Kohm)	Vr
EC2SB-05S33						
EC2SB-12S33	3.3	2.70	1.8	0.27	9.1	1.25
EC2SB-24S33						
EC2SB-48S33						
EC2SB-05S05						
EC2SB-12S05	5.0	2.32	2.32	0	8.2	2.5
EC2SB-24S05						
EC2SB-48S05						
EC2SB-05S12						
EC2SB-12S12	12.0	6.8	2.4	2.32	22	2.5
EC2SB-24S12						
EC2SB-48S12						
EC2SB-05S15	15.0	8.06	2.38	3.9	22	2.5
EC2SB-12S15						
EC2SB-24S15	15.0	8.06	2.4	3.9	27	2.5
EC2SB-48S15						

Table 1 – Trim up and Trim down Resistor Values
For example, to trim-up the output voltage of 5.0V module

(EC2SB12S05) by 10% to 5.5V, R trim-up is calculated as follows:

$$V_o - V_{o, nom} = 5.5 - 5.0 = 0.5V$$

$$R1 = 2.32 \text{ Kohm}$$

$$R2 = 2.32 \text{ Kohm}$$

$$R3 = 0 \text{ Kohm}$$

$$Rt = 8.2 \text{ Kohm}, Vr= 2.5$$

$$R_{trim-up} = \left(\frac{2.5 \times 2.32 \times (2.32 + 0)}{0.5 \times 2.32} \right) - 8.2 = 3.06(\text{K}\Omega)$$

The value of R trim-down defined as:

$$R_{trim-down} = R1 \times \left(\frac{Vr \times R1}{(V_{o, nom} - V_o) \times R2} - 1 \right) - Rt \quad (\text{K}\Omega)$$

Where:

R trim-down is the external resistor in Kohm.

Vo, nom is the nominal output voltage.

Vo is the desired output voltage.

R1, Rt, R2, R3 and Vr are internal to the unit and are defined in Table 1

For example, to trim-down the output voltage of 5.0V module

(EC2SB12S05) by 10% to 4.5V, R trim-down is calculated as follows:

$$V_{o,nom} - V_o = 5.0 - 4.5 = 0.5V$$

$$R1 = 2.32 \text{ Kohm}$$

$$R2 = 2.32 \text{ Kohm}$$


$$R3 = 0 \text{ Kohm}$$

$$Rt = 8.2 \text{ Kohm}, Vr= 2.5$$

$$R_{trim-down} = 2.32 \times \left(\frac{(2.5 \times 2.32)}{0.5 \times 2.32} - 1 \right) - 8.2 = 1.08 \quad (\text{K}\Omega)$$

6.7 Output Ripple and Noise Measurement

The test set-up for noise and ripple measurements is shown in Figure6. A coaxial cable was used to prevent impedance mismatch reflections disturbing the noise readings at higher frequencies. Measurements are taken with output appropriately loaded and all ripple/noise specifications are from D.C. to 20MHz Band Width.

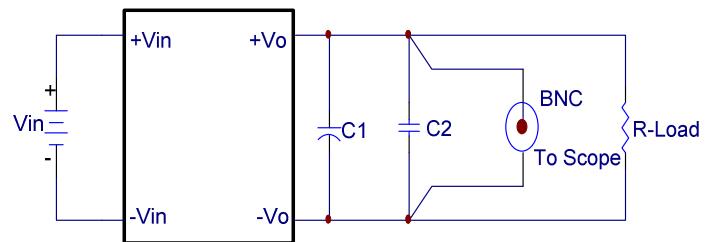

Note: C1: 10uF tantalum capacitor
C2: 1uF Ceramic capacitor

Figure6 Output Voltage Ripple and Noise Measurement Set-Up

6.8 Output Capacitance

The EC2SB series converters provide unconditional stability with or without external capacitors. For good transient response low ESR output capacitors should be located close to the point of load. These series converters are designed to work with load capacitance to see technical specifications



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

7. Safety & EMC

7.1 Input Fusing and Safety Considerations.

The EC2SB series converters have not an internal fuse. However, to achieve maximum safety and system protection, always use an input line fuse. We recommended a fast acting fuse, 5A for 5Vin, 4A for 12Vin models, 2A for 24Vin models, 1A 48Vin modules. Figure 7 circuit is recommended by a Transient Voltage Suppressor diode across the input terminal to protect the unit against surge or spike voltage and input reverse voltage.

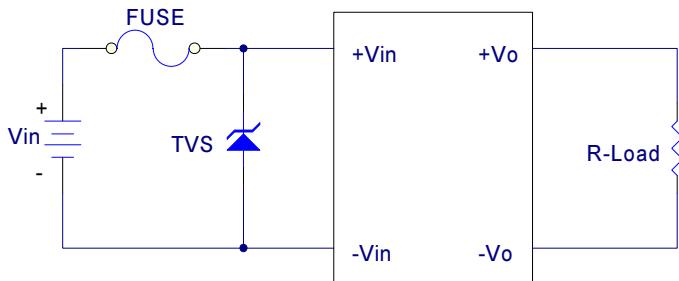


Figure 7 Input Protection

7.2 EMC Considerations

EMI Test standard: EN55032 Class A and Class B Conducted Emission

Test Condition: Input Voltage: Nominal, Output Load: Full Load

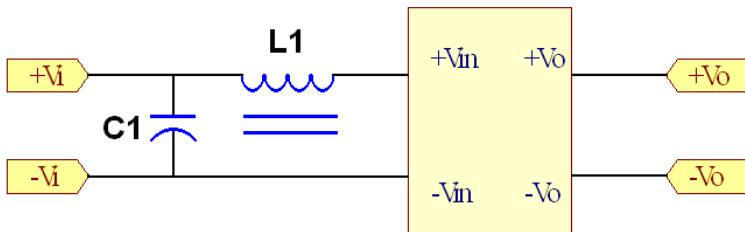


Figure 8 Connection circuit for conducted EMI testing



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

Model No.	EN55032 Class A		EN55032 Class B	
	C1	L1	C1	L1
EC2SB-05S33	NC	Short	TBD	TBD
EC2SB-05S05	NC	Short	TBD	TBD
EC2SB-05S12	NC	Short	TBD	TBD
EC2SB-05S15	NC	Short	TBD	TBD
EC2SB-05D05	NC	Short	TBD	TBD
EC2SB-05D12	NC	Short	TBD	TBD
EC2SB-05D15	NC	Short	TBD	TBD
EC2SB-12S33	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12S05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12S12	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12S15	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12D05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12D12	NC	Short	1uF /100V 1812	3.9uH
EC2SB-12D15	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24S33	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24S05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24S12	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24S15	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24D05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24D12	NC	Short	1uF /100V 1812	3.9uH
EC2SB-24D15	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48S33	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48S05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48S12	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48S15	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48D05	NC	Short	1uF /100V 1812	3.9uH
EC2SB-48D12	NC	Short	1uF /100V 1812	3.9uH
EC2SB48D15	NC	Short	1uF /100V 1812	3.9uH

Note: All of capacitors are ceramic capacitors.



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

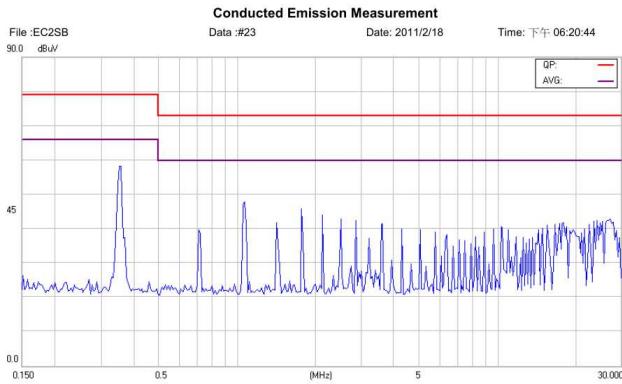


Figure 9 Conducted Class A of EC2SB-05S33

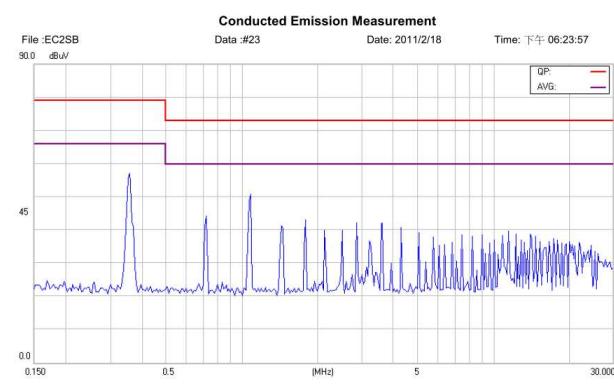


Figure 10 Conducted Class A of EC2SB-05S05

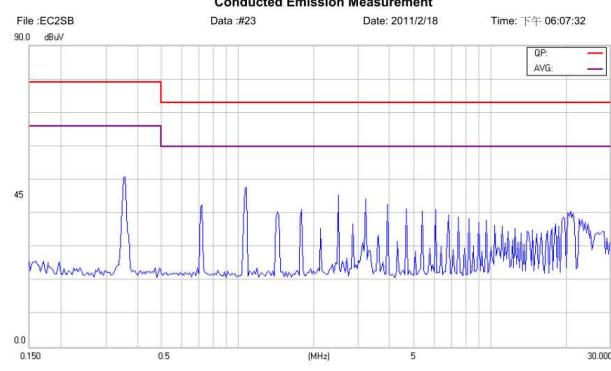


Figure 11 Conducted Class A of EC2SB-05S12

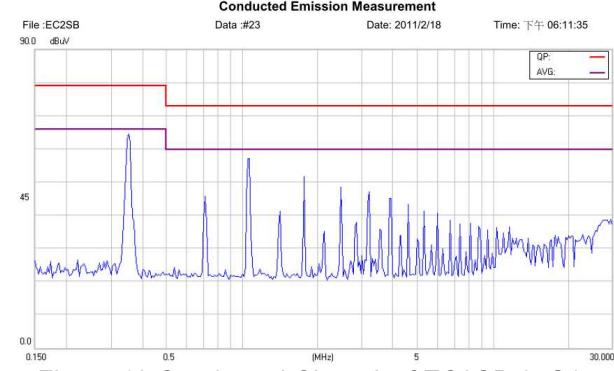


Figure 12 Conducted Class A of EC2SB-05S15

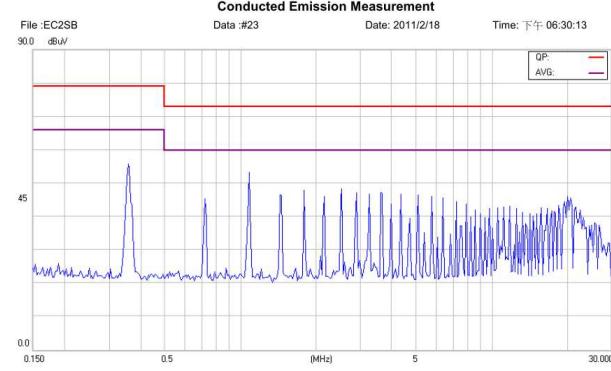


Figure 13 Conducted Class A of EC2SB-05D05

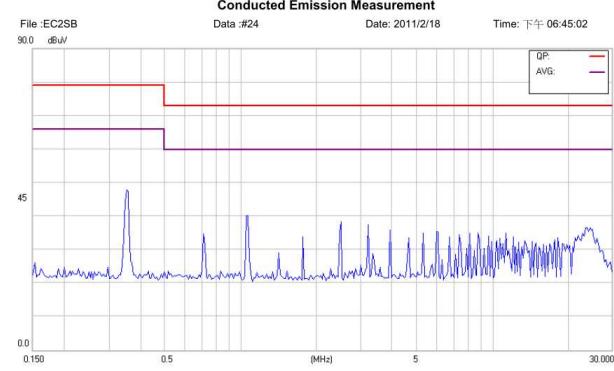


Figure 14 Conducted Class A of EC2SB-05D12

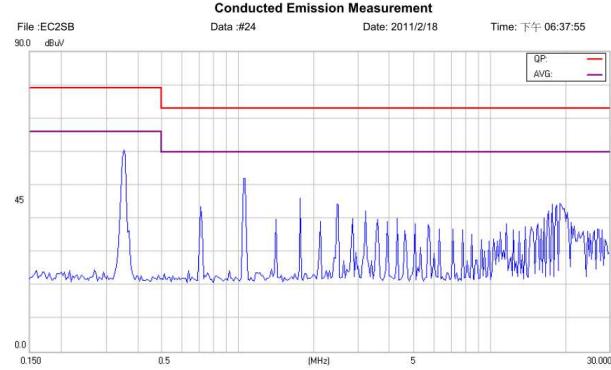


Figure 15 Conducted Class A of EC2SB-05D15

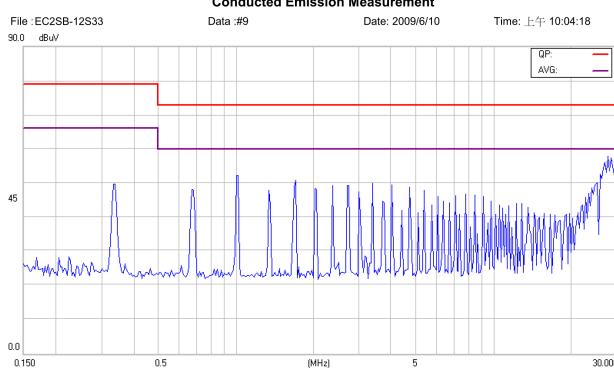


Figure 16 Conducted Class A of EC2SB-12S33



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

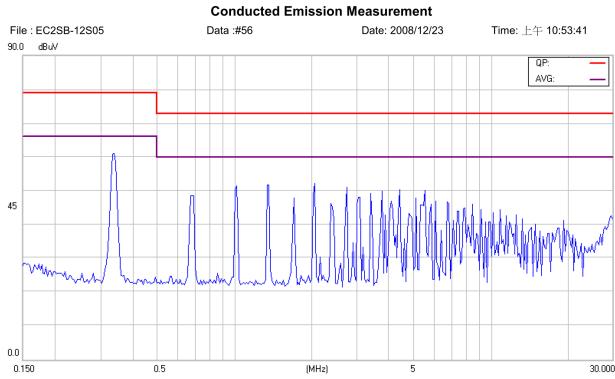


Figure 17 Conducted Class A of EC2SB-12S05

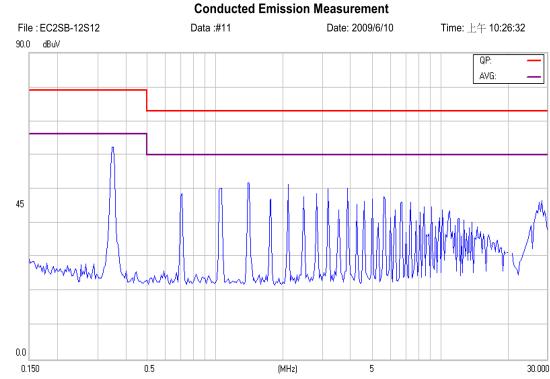


Figure 18 Conducted Class A of EC2SB-12S12

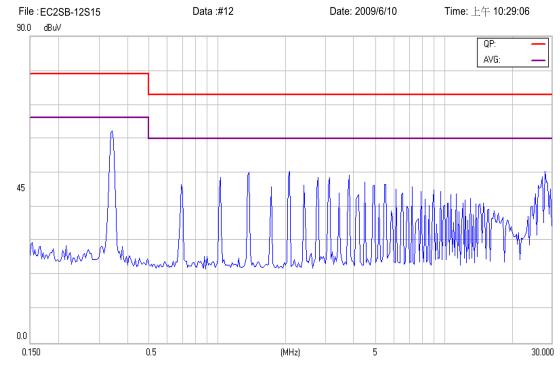


Figure 19 Conducted Class A of EC2SB-12S15

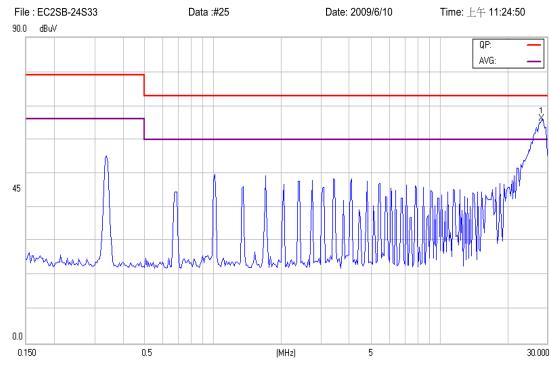


Figure 20 Conducted Class A of EC2SB-24S33

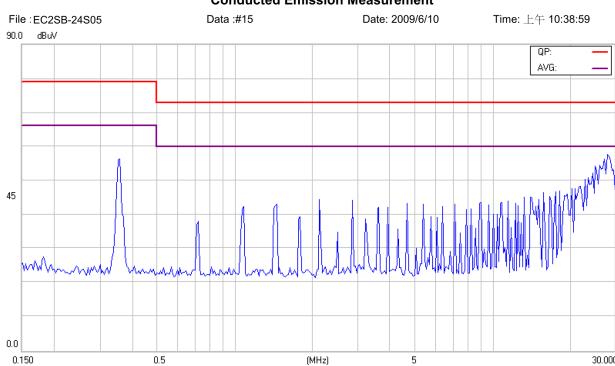


Figure 21 Conducted Class A of EC2SB-24S05

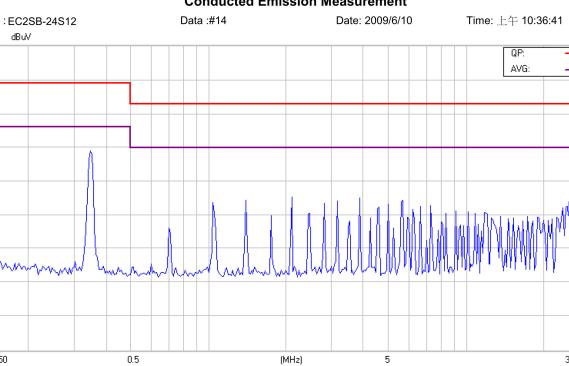


Figure 22 Conducted Class A of EC2SB-24S12

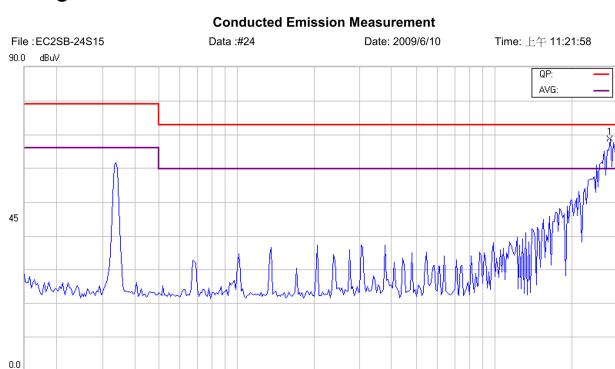


Figure 23 Conducted Class A of EC2SB-24S15

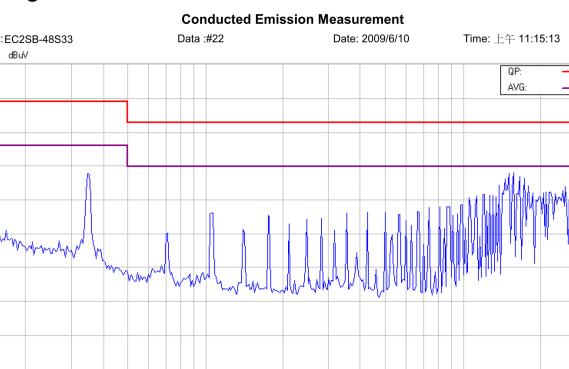


Figure 24 Conducted Class A of EC2SB-48S33



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

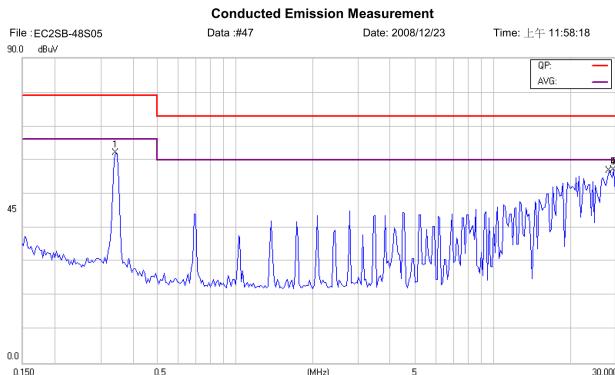


Figure 25 Conducted Class A of EC2SB-48S05

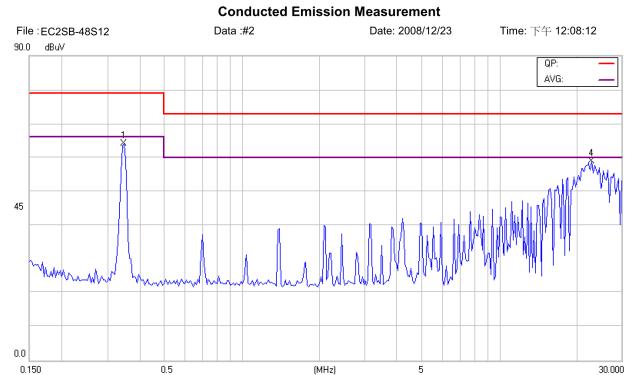


Figure 26 Conducted Class A of EC2SB-48S12

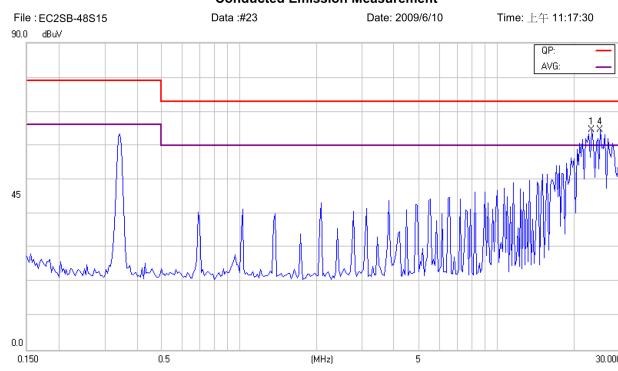


Figure 27 Conducted Class A of EC2SB-48S15

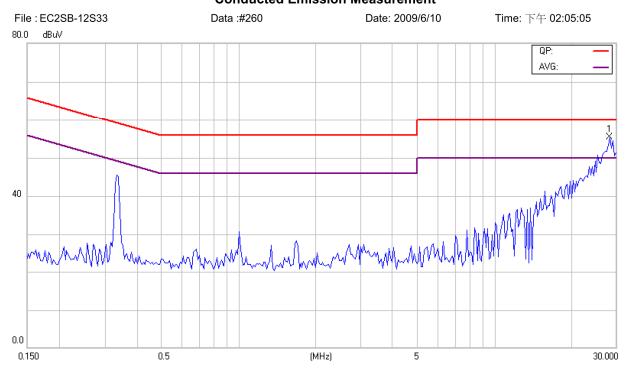


Figure 28 Conducted Class B of EC2SB-12S33

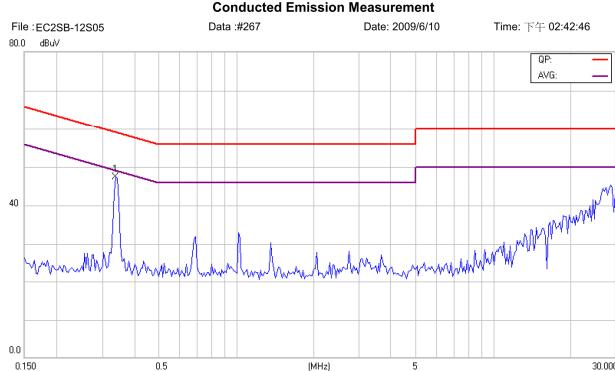


Figure 29 Conducted Class B of EC2SB-12S05

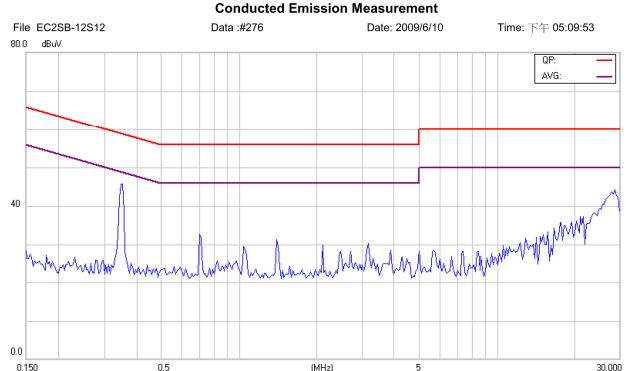


Figure 30 Conducted Class B of EC2SB-12S12

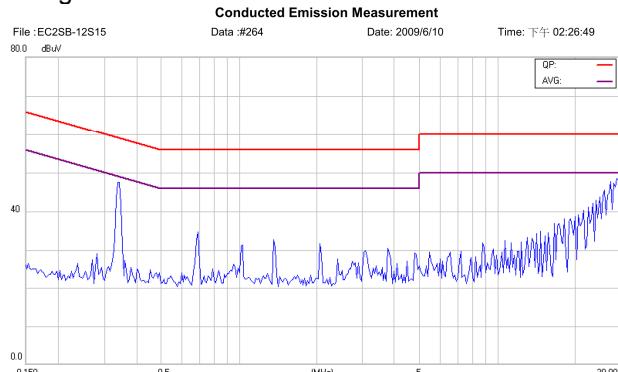


Figure 31 Conducted Class B of EC2SB-12S15

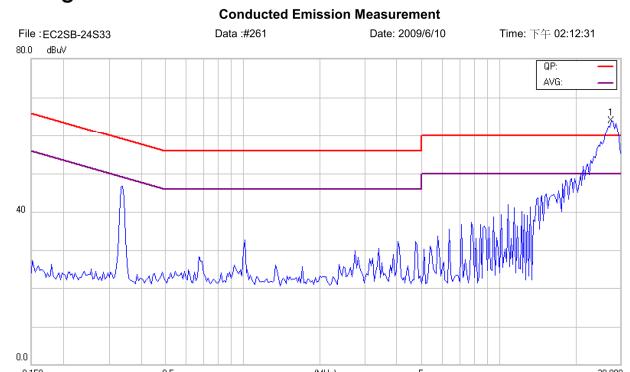


Figure 32 Conducted Class B of EC2SB-24S33



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020

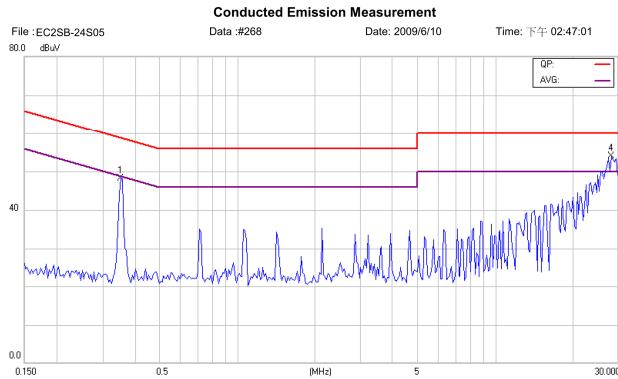


Figure 33 Conducted Class B of EC2SB-24S05

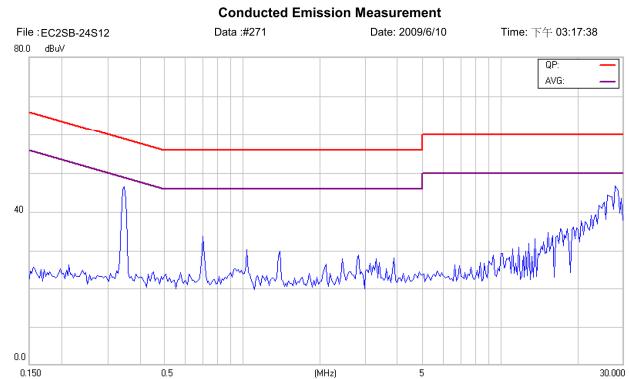


Figure 34 Conducted Class B of EC2SB-24S12

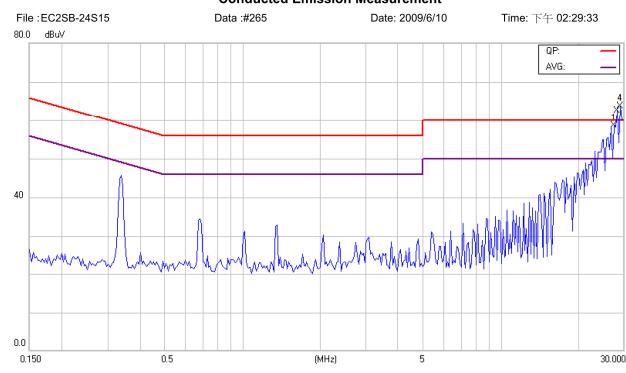


Figure 35 Conducted Class B of EC2SB-24S15

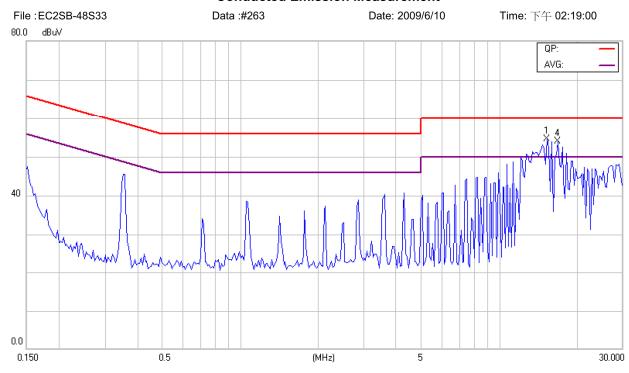


Figure 36 Conducted Class B of EC2SB-48S33

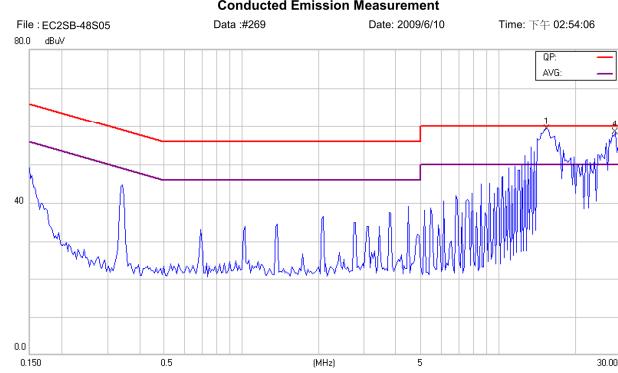


Figure 37 Conducted Class B of EC2SB-48S05

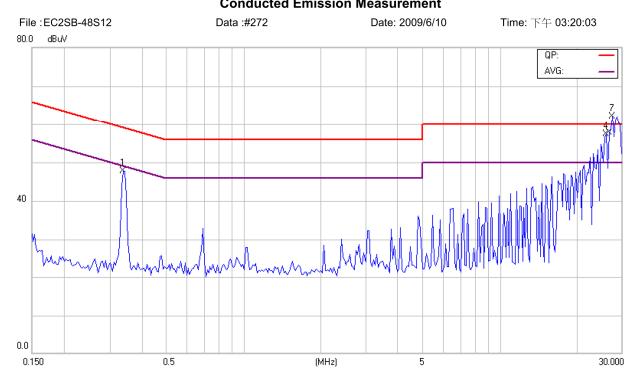


Figure 38 Conducted Class B of EC2SB-48S12

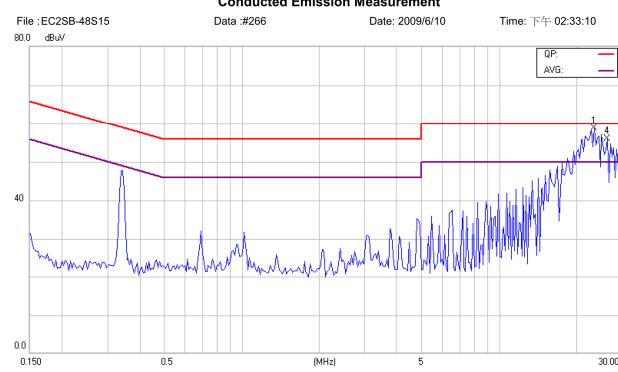



Figure 38 Conducted Class B of EC2SB-48S15



EC2SB 10W Isolated DC-DC Converters

Application Note V12 November 2020


8. Part Number

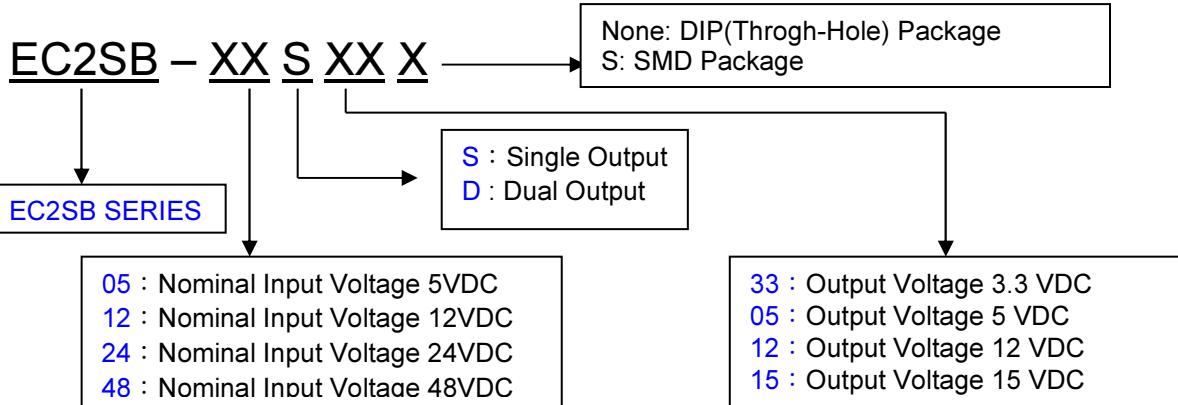



9. Mechanical Specifications

NOTE: Pin Size is 0.04 ± 0.004 Inch (1.0 ± 0.1 mm) DIA
All Dimensions In Inches (mm)
Tolerances Inches: $X.XX \pm 0.02$, $X.XXX \pm 0.010$
Millimeters: $X.X \pm 0.5$, $X.XX \pm 0.25$

THROUGH-HOLE PACKAGE

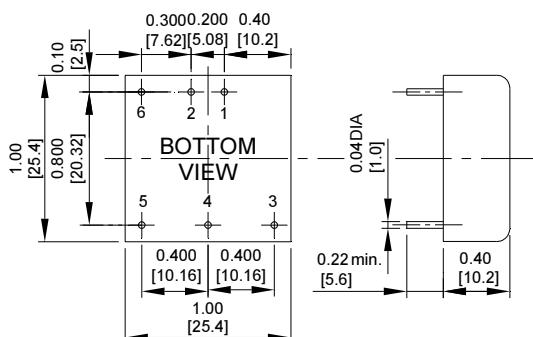

Pin	PIN CONNECTION	
	Single	Dual
1	+Input	+Input
2	-Input	-Input
3	+V Output	+V Output
4	Trim	Common
5	-V Output	-V Output
6	Remote	Remote

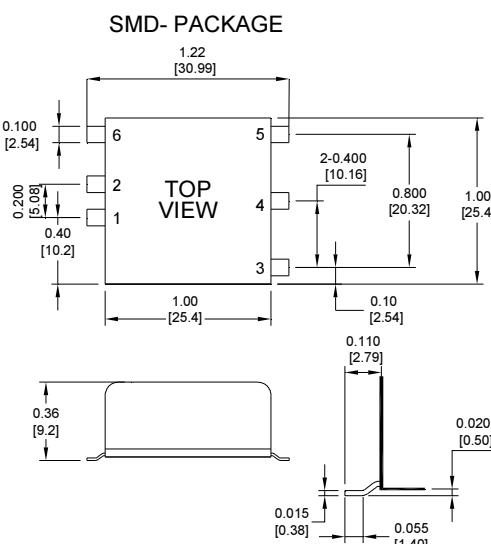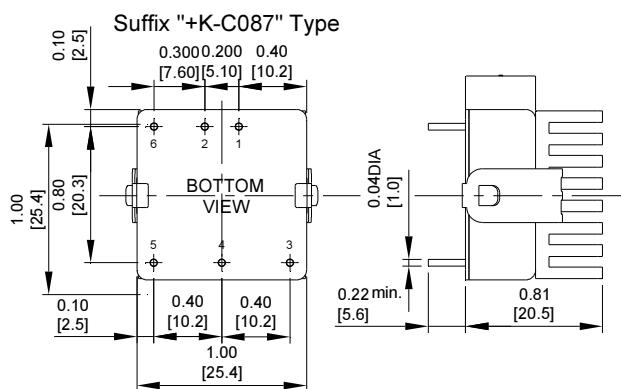

CINCON ELECTRONICS CO., LTD.

Headquarter Office:

14F, No.306, Sec.4, Hsin Yi Rd.,
Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com.tw
Web Site: <http://www.cincon.com>

Factory:

No. 8-1, Fu Kong Rd.,
Fu Hsing Industrial Park
Fu Hsing Hsiang, ChangHua Hsien,
Taiwan
Tel: 886-4-7690261
Fax: 886-4-7698031

Cincon American Office:

1655 Mesa Verde Ave, Ste 180,
Ventura, CA 93003
Tel: 805-639-3350
Fax: 805-639-4101
E-mail: info@cincon.com